



A-A

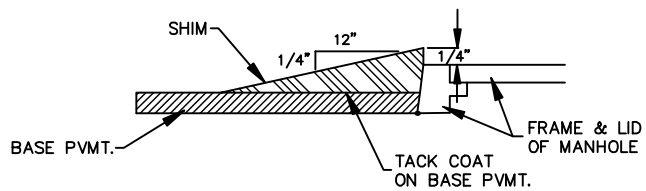

C-C

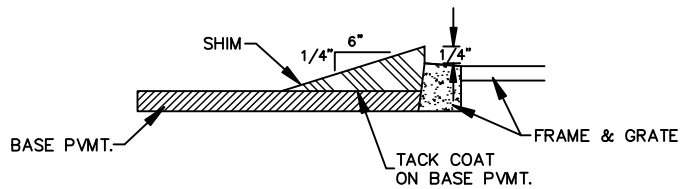

B-B

NOTES:

1. MATERIAL TO BE BITUMINOUS CONCRETE CLASS 3 OR APPROVED EQUAL PER CT. D.O.T. SPEC. FORM 816 AS AMENDED.
2. WIDTH OF SHIMS AS SHOWN ON PLAN VIEWS ARE BASED ON TYPICAL 1-1/2" EXPOSURE OF STRUCTURE. ACTUAL WIDTHS MAY VARY BASED ON FIELD CONDITIONS.
3. TACK COAT TO BE APPLIED PRIOR TO PLACEMENT OF SHIM. COATING TO BE APPLIED PER M 04.01.1d4, FORM 816.

NOT TO SCALE

TOWN OF SOUTH WINDSOR
STANDARD DETAIL

MARCH, 2005

TEMPORARY SHIM DETAIL

REVISED:

APPROVED

PUBLIC WORKS DIRECTOR