


PLAN VIEW

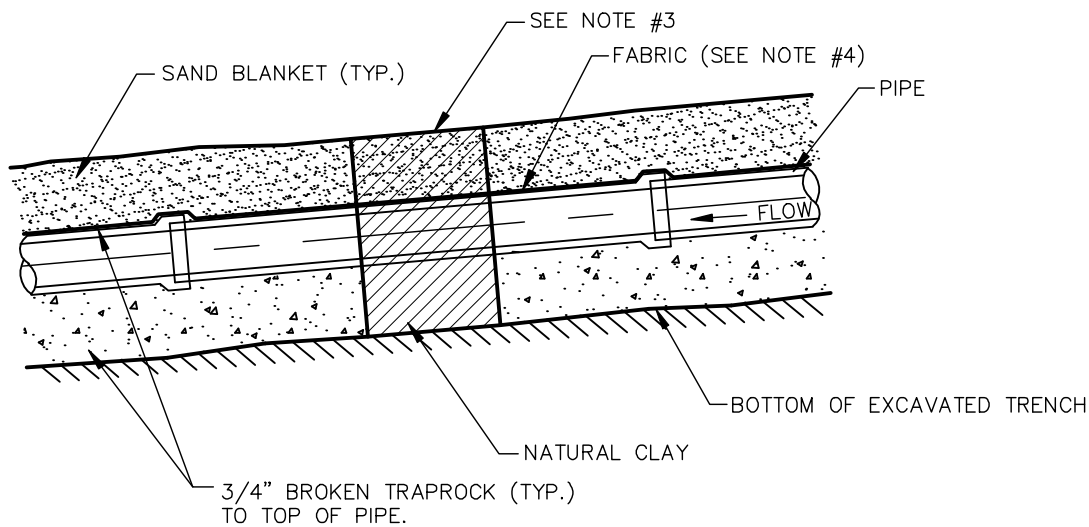

PROFILE VIEW

NOTES:

1. CLAY DRAINAGE STOPS TO BE LOCATED ON UPSTREAM SIDE OF MANHOLES, AND SPACED A MAXIMUM OF 100' +/- APART, OR AS DIRECTED BY THE TOWN ENGINEER.
2. WIDTH OF STOP SHALL EXTEND TO UNDISTURBED MATERIAL ON BOTH SIDES OF TRENCH.
3. WHERE ROCK IS ENCOUNTERED, HEIGHT OF STOP SHALL EXTEND TO THE TOP OF ROCK.
4. FILTER FABRIC SHALL BE NONWOVEN AND SHALL MEET AASHTO M288-00, CLASS 2.

NOT TO SCALE

TOWN OF SOUTH WINDSOR  
STANDARD DETAIL

MARCH, 2005

**NATURAL CLAY  
DRAINAGE STOPS**

REVISED:

APPROVED

PUBLIC WORKS DIRECTOR