220, 245, 265 & 270 GATEWAY BOULEVARD ~ SOUTH WINDSOR ~ CT #15300190, 15300218, #15300240 & #15300274

	ZONING	TABLE	
ZONE: GD ZONE (BUCKLAN	ND ROAD GATEWAY DEVEL	OPMENT ZONE)	
ITEM	REQUIRED/ ALLOWED	PREVIOUSLY APPROVED (200 & 205 GATEWAY BOULEVARD)	PROPOSED (200, 205, 220, 245, 265 & 270 GATEWAY BOULEVARD)
LOT AREA	3 AC MIN.	12.99 AC	32.86 AC
LOT FRONTAGE	200'	270'	1269'
LOT DEPTH	200'	1065.27'	1065.27
FRONT YARD	65'	67'	67'
SIDE YARD	25'	45.9'	45.9'
REAR YARD	10'	900'	134.61'
BUILDING HEIGHT	90'/6 STORIES*	26.4' (1 STORY)	31.25' (1 STORY)*
PARKING	SEE BELOW**	124	488**
INTERIOR LANDSCAPING	10%	10.5%	10.3%
IMPERVIOUS COVERAGE	60%	24.6%	34.57%***

ES:
PROPOSED BUILDINGS TO BE SIZED INDIVIDUALLY PER TENANT AND ZONING REQUIREMENTS.
DISTANCE FROM PROPERTY LINE WILL DEFINE MAXIMUM HEIGHT OF EACH BUILDING:
30' MAX BUILDING HEIGHT (22 STORIES) WITHIN 125' OF PUBLIC STREET RIGHT OF WAY.
60' MAX BUILDING HEIGHT (4 STORIES) > 125' FROM PUBLIC RIGHT OF WAY.
90' MAX HEIGHT (6 STORIES) > 200' FROM THE PUBLIC RIGHT OF WAY MAY BE GRANTED
WITH COMMISSION APPROVAL.


** PARKING CALCULATION:

PROPOSED 50,400 SQFT (GFA) OFFICE: 50,400 (GFA) @ 4 SPACE/1,000 SQFT GFA = 202 MINIMUM SPACES REQUIRED

PROPOSED 38,880 SQFT (GFA) RETAIL: 38,880 (GFA) @ 1 SPACE/200 SQFT GFA = 195 MINIMUM SPACES REQUIRED

THE GATEWAY WILL HAVE A TOTAL OF 612 PARKING SPACES WITH THE TWO APPROVED BUILDINGS AND FOUR PROPOSED BUILDINGS, THERE ARE 180 SPACES LOCATED BETWEEN THE BUILDINGS AND BUCKLAND ROAD, LESS THAN ONE THIRD OF THE TOTAL AS REQUIRED PER THE ZONING REGULATIONS.

MMEERVIOUS COVERAGE WAS CALCULATION FOR ALL DEVELOPMENT AT 200, 205, 220, 245, 265 & 270 GATEWAY BOULEVARD. THE SITES TOTAL 32.86 ACRES, 200 & 205 GATEWAY BULVO INCLIDE A PREVIOUSLY APPROVED 3.19 ACRES OF IMPERVIOUS SURFACE. THE NEW DEVELOPMENT PROPOSES AN ADDITIONAL 8.17 ACRES OF IMPERVIOUS SURFACE, BRINGING THE ENTIRE SITE'S TOTAL UP TO 11.36 ACRES.

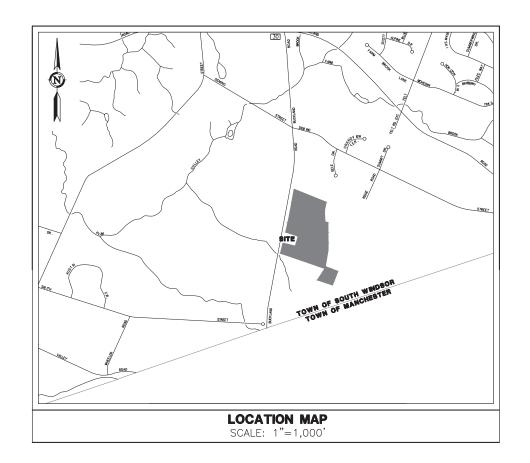

	SHEET INDEX	
C-T1	COVER SHEET	1 of 18
C-T2	KEY MAP	2 of 18
C-DM1	DEMOLITION PLAN	3 of 18
C-OS1	OVERALL SITE PLAN	4 of 18
C-SP1 - C-SP2	SITE PLAN	5-6 of 18
C-GD1 - C-GD2	GRADING PLAN	7-8 of 18
C-DR1	DRAINAGE PLAN	9 of 18
C-UT1	UTILITY PLAN	10 of 18
C-ES1	EROSION & SEDIMENTATION PLAN	11 of 18
C-ES2	EROSION & SEDIMENTATION NOTES & DETAILS	12 of 18
C-LS1	WETLAND MITIGATION PLAN	13 of 18
C-D1	NOTES, DETAILS, & LEGEND	14 of 18
C-D2 - C-D5	DETAILS	15-18 of 18
EM-1 - EM-2	EASEMENT & PRELIMINARY EASEMENT PLANS	1-2 of 2
V-1 - V-4	PROPERTY & TOPOGRAPHIC SURVEY	1-4 of 4
L.1 - L.5	SITE PLANTING PLAN (BY OTHERS)	1-5 of 5
	SITE LIGHTING PLAN (BY OTHERS)	
	ARCHITECTURAL PLANS & ELEVATIONS (BY OTHERS)	

PRELIMINARY NOT FOR CONSTRUCTION THESE PLANS ARE FOR PLANNING PURPOSES ONLY INTENDED TO SECURE REGULATORY APPROVALS. ONLY FINAL PLANS STAMPED APPROVED BY THI TOWN SHALL BE USED FOR CONSTRUCTION PURPOSES.

GENERAL NOTES:

-THESE PLANS ARE INVALID UNLESS THEY BEAR THE SEAL OR STAMP, AND ORIGINAL SIGNATURE OF THE PROFESSIONAL ENGINEER, LAND SURVEYOR, OR LANDSCAPE ARGUITECT.

*THESE PLANS AND OTHER ITEMS PREPARED BY DESIGN PROFESSIONALS, INC. OPPU ARE INSTRUMENTS OF SERVICE AND REMAIN ITS PROPERTY. THE USE OF THESE ITEMS BY DPTS CLIENT IS SUBJECT TO THE TERMS SET FORTH IN THE ACREEMENT BETWEEN CLIENT AND DPI. REPRODUCTION AND/OR USE OF THESE ITEMS BY OTHERS IS PROVIDED WITHOUT AND THE WRITTEN CONSENT OF DPI.

CIVIL ENGINEER & LAND SURVEYOR: esign rofessionals CIVIL & TRAFFIC ENGINEERS / LAND SURVEYORS

PLANNERS / LANDSCAPE ARCHITECTS

21 Jeffrey Drive P.O. Box 1167 South Windsor, CT 06074

Phone: 860-291-8755 Fax: 860-291-8757 www.designprofessionalsinc.com

ARCHITECTS:

Prellwitz Chilinski Associates, Inc. 221 Hampshire Street Cambridge, MA 02139 617-547-8120

Schadler Selnau Associates, PC 5 Waterville Road Farmington, CT 06032 860-677-9620


LANDSCAPE ARCHITECT:

CR3 Studio at Loureiro Engineering Associates, Inc. 100 Northwest Drive Plainville, CT 06062 860-747-6181 www.prellwitzchilinski.com www.hsa-architects.com www.loureiro.com

BUCKLAND EAST, LLC 6 EXECUTIVE DRIVE, SUITE 100 FARMINGTON, CT 06032

KEY MAP



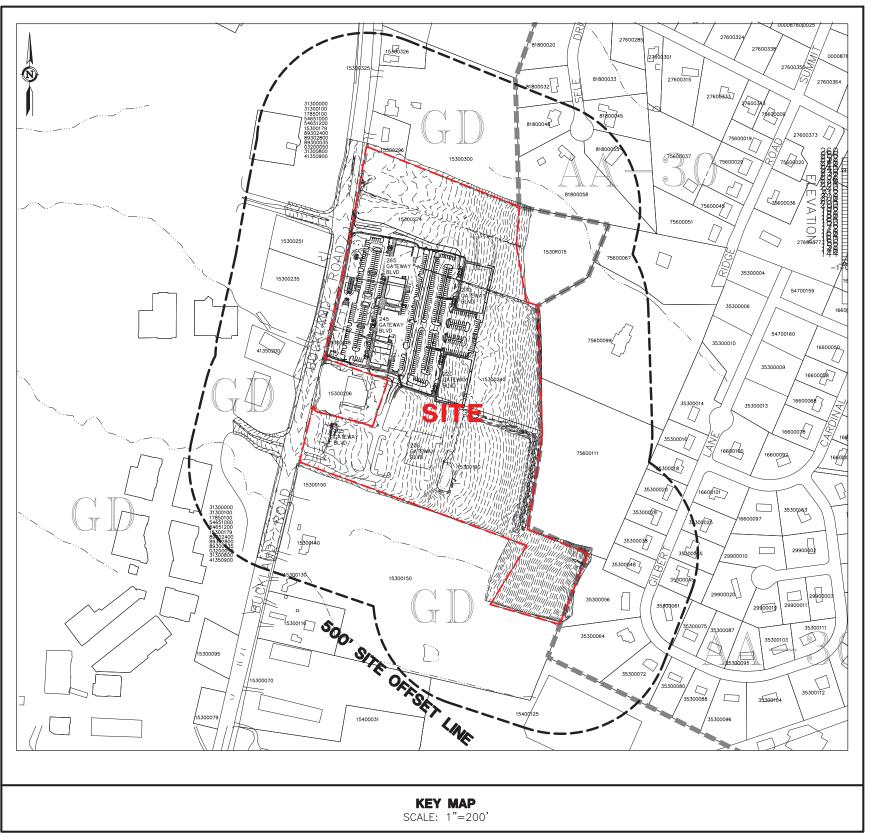

1 MUNSON ROAD LLC 6 EXECUTIVE DRIVE, SUITE 100

BUCKLAND EAST, LLC 6 EXECUTIVE DRIVE, SUITE 100 FARMINGTON, CT 06032

APPLICANT: BUCKLAND EAST, LLC 6 EXECUTIVE DRIVE, SUITE 100 FARMINGTON, CT 06032 860-674-5624

PROPERTY OWNERS: 515 WEST MIDDLE TURNPIKE C/O ASSOCIATES LIMITED PARTNERSI-6 EXECUTIVE DRIVE, SUITE 100 FARMINGTON, CT 06032

MAP KEY

3530. 8737. 8737. 887W

GATEWAY
TE PLAN
55 & 270 GATEWAY BLV


THE GA

H REM BE


220,

C-T2 SHEET 2 OF 18

the Crybba SE30 Autocoad Narth-Site Planding Layout 03 C-DMT Potted 7/8/2020 1151 AM Last Saved 7/8/2020 1148 AM Last Saved By, damalgameson

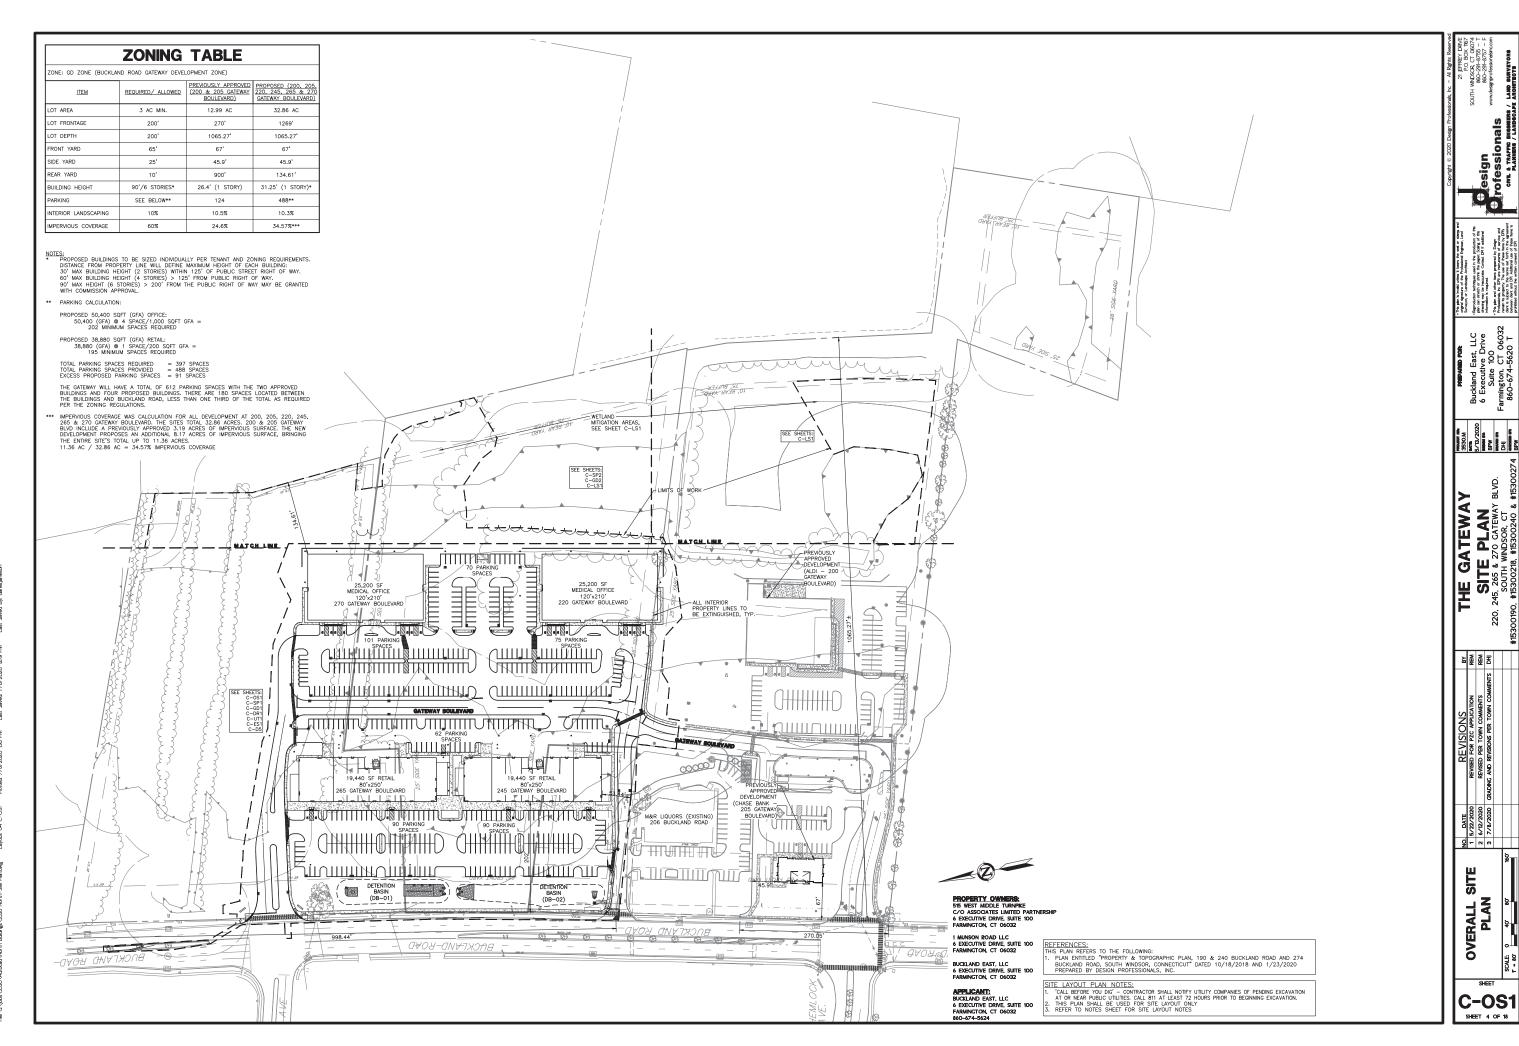


The state of the form of the state of the st

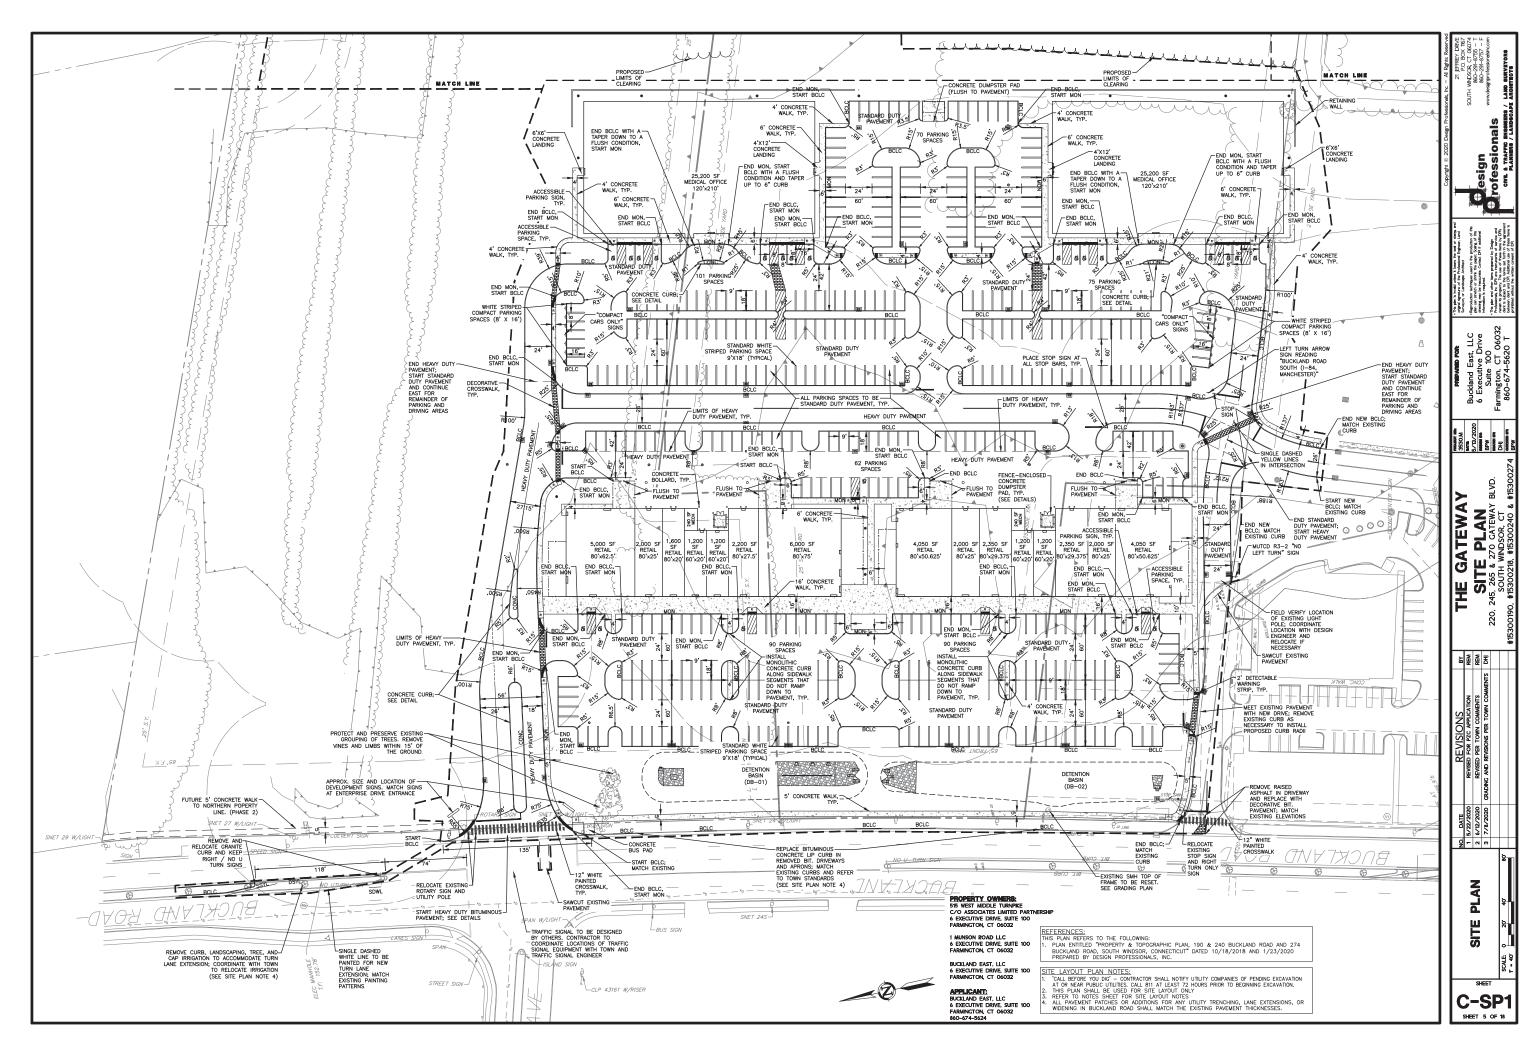

Pie Ci yaba 3530 Autocad Narth Buldings 1530 Narth-Bie Plentdag Layout 05 C-971 Potted 7/8/2020 134 PM Last Sawed 7/8/2020 1219 PM Last Sawed By: denisjames


Ab. C'S Ward SERON Antonia D. Balbaran SERO Noveth-Clin Discretium | manner CF C-CD | Destruct 7/8/70701 (20 DM | see Councel 7/8/7070 (20 DM | see Councel Day American Day A


G.Yaba 2530/Autocad/Narth Buldregs 2530 Narth-Ste Planding Layout 07 C-CD1 Potted 7/8/2020 155 PM Last Saved 7/8/2020 129 PM Last Saved By danellameson

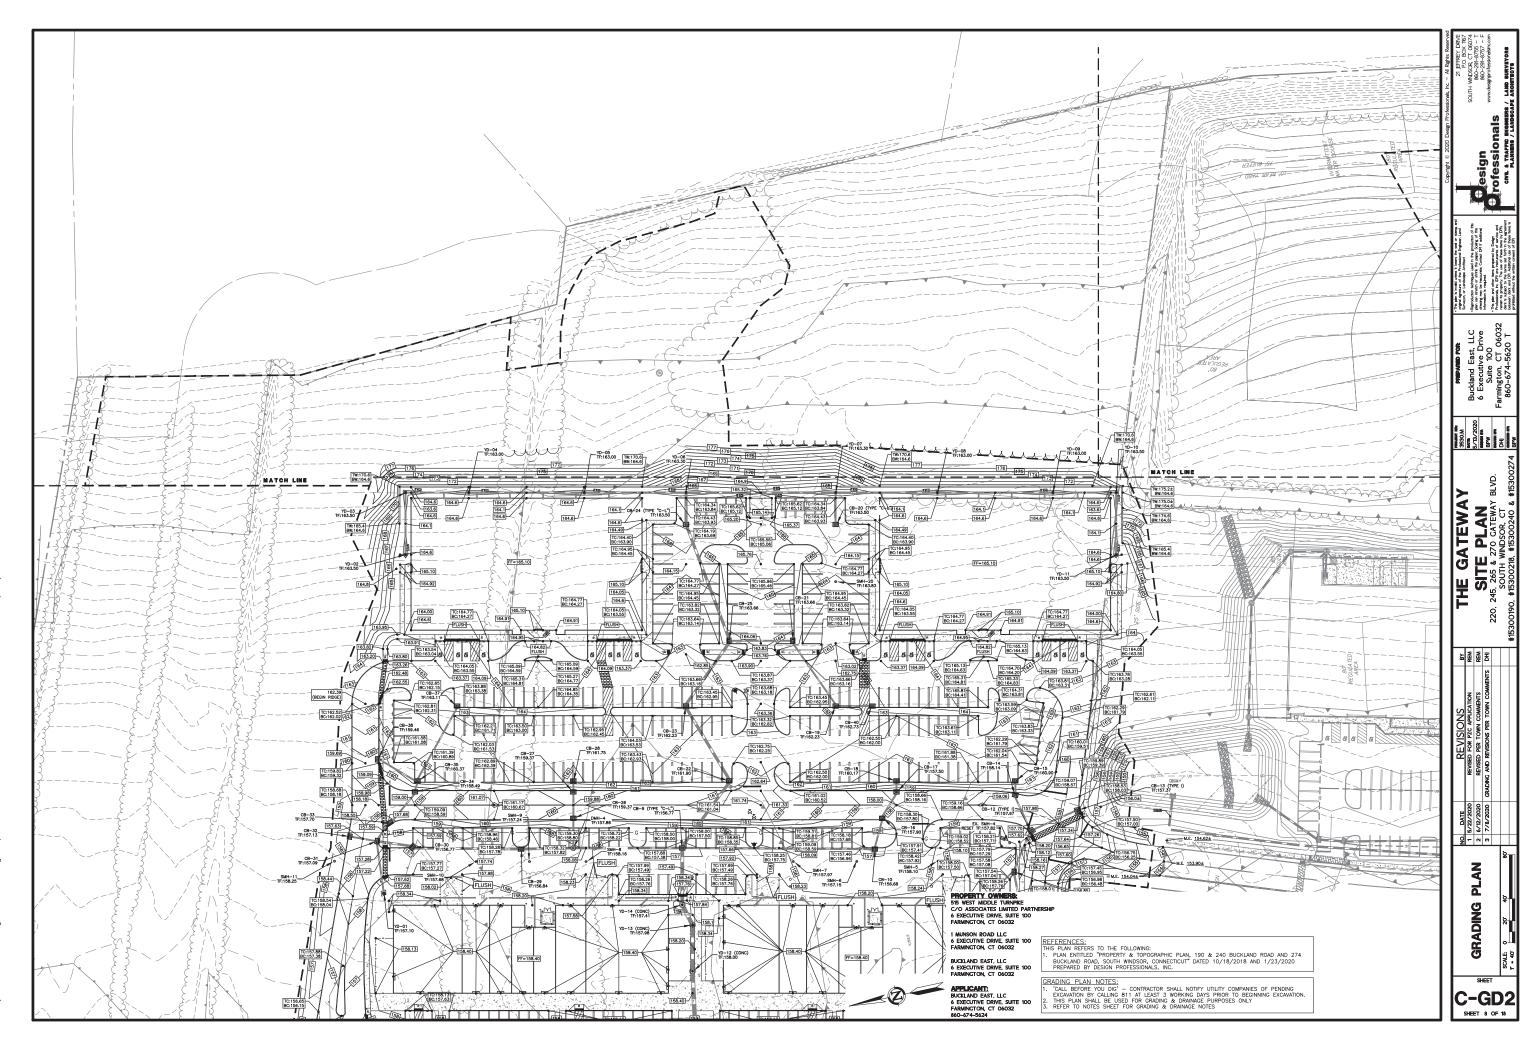

The CVARN-3550 Valored North Buldres ASSO North-Ste Pendove Liveat 08 C-CD2 Petrod 37/8/2020 156 PM Last Sowed 77/8/2020 1519 PM Last Sowed Ry development

26-2530 Autocact North Buiches 2530 North-Sie Pandwe Lavout 09 C-DRI Potted 7/8/2020 135 PM Last Saved 7/8/2020 129 PM Last Saved By dentellemeson

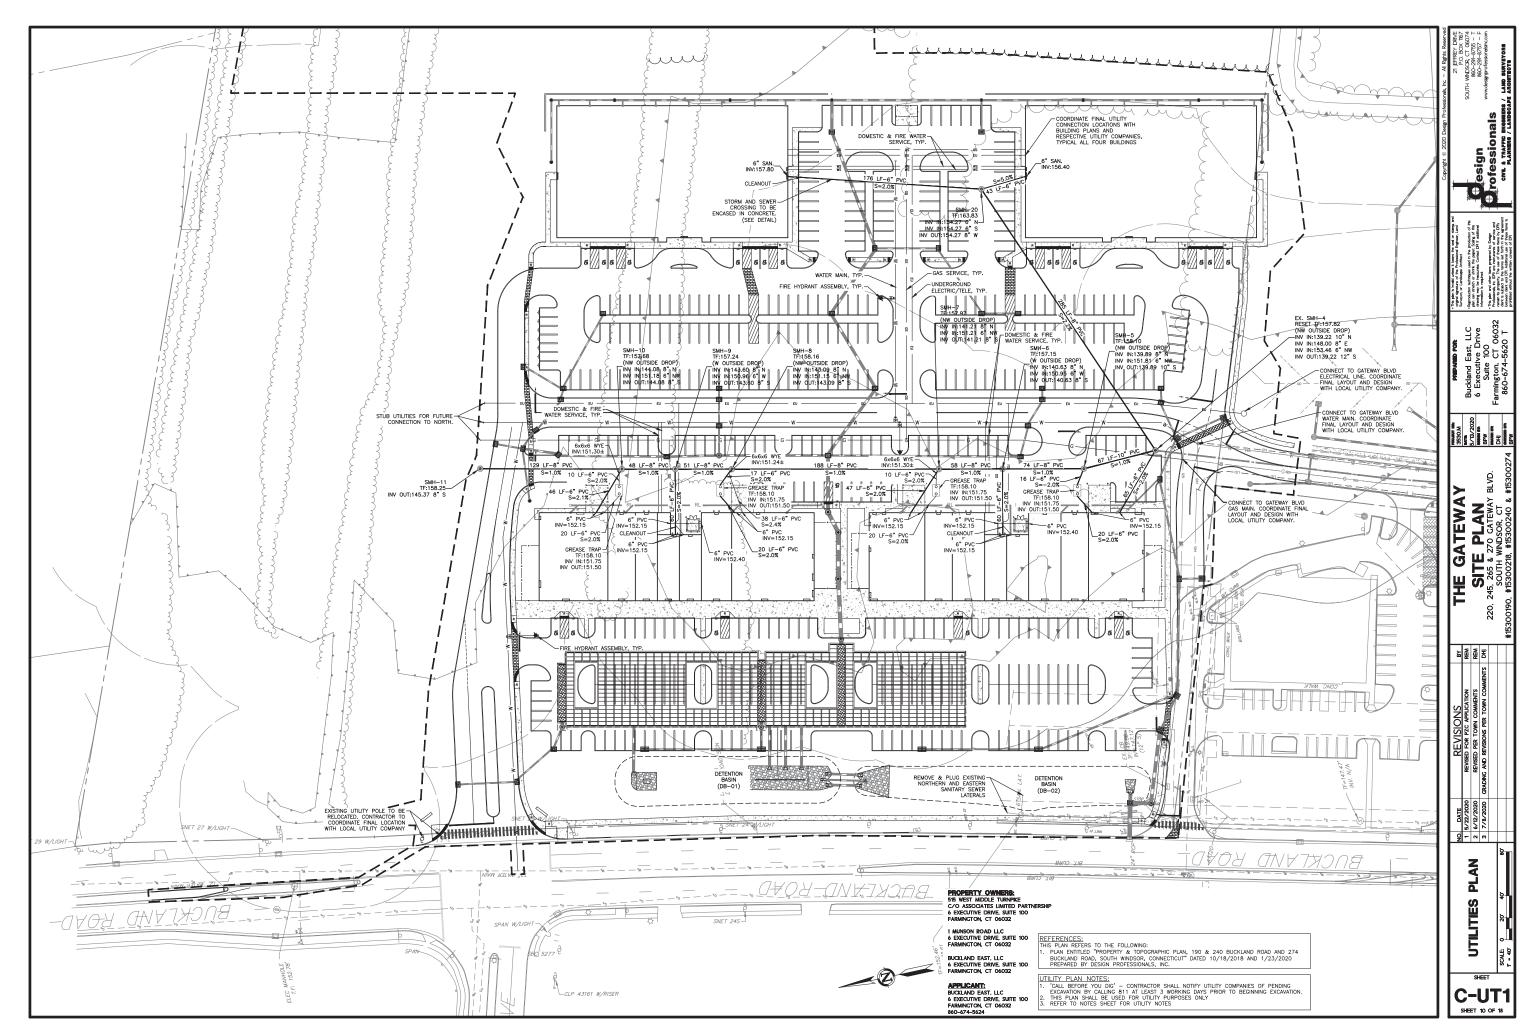

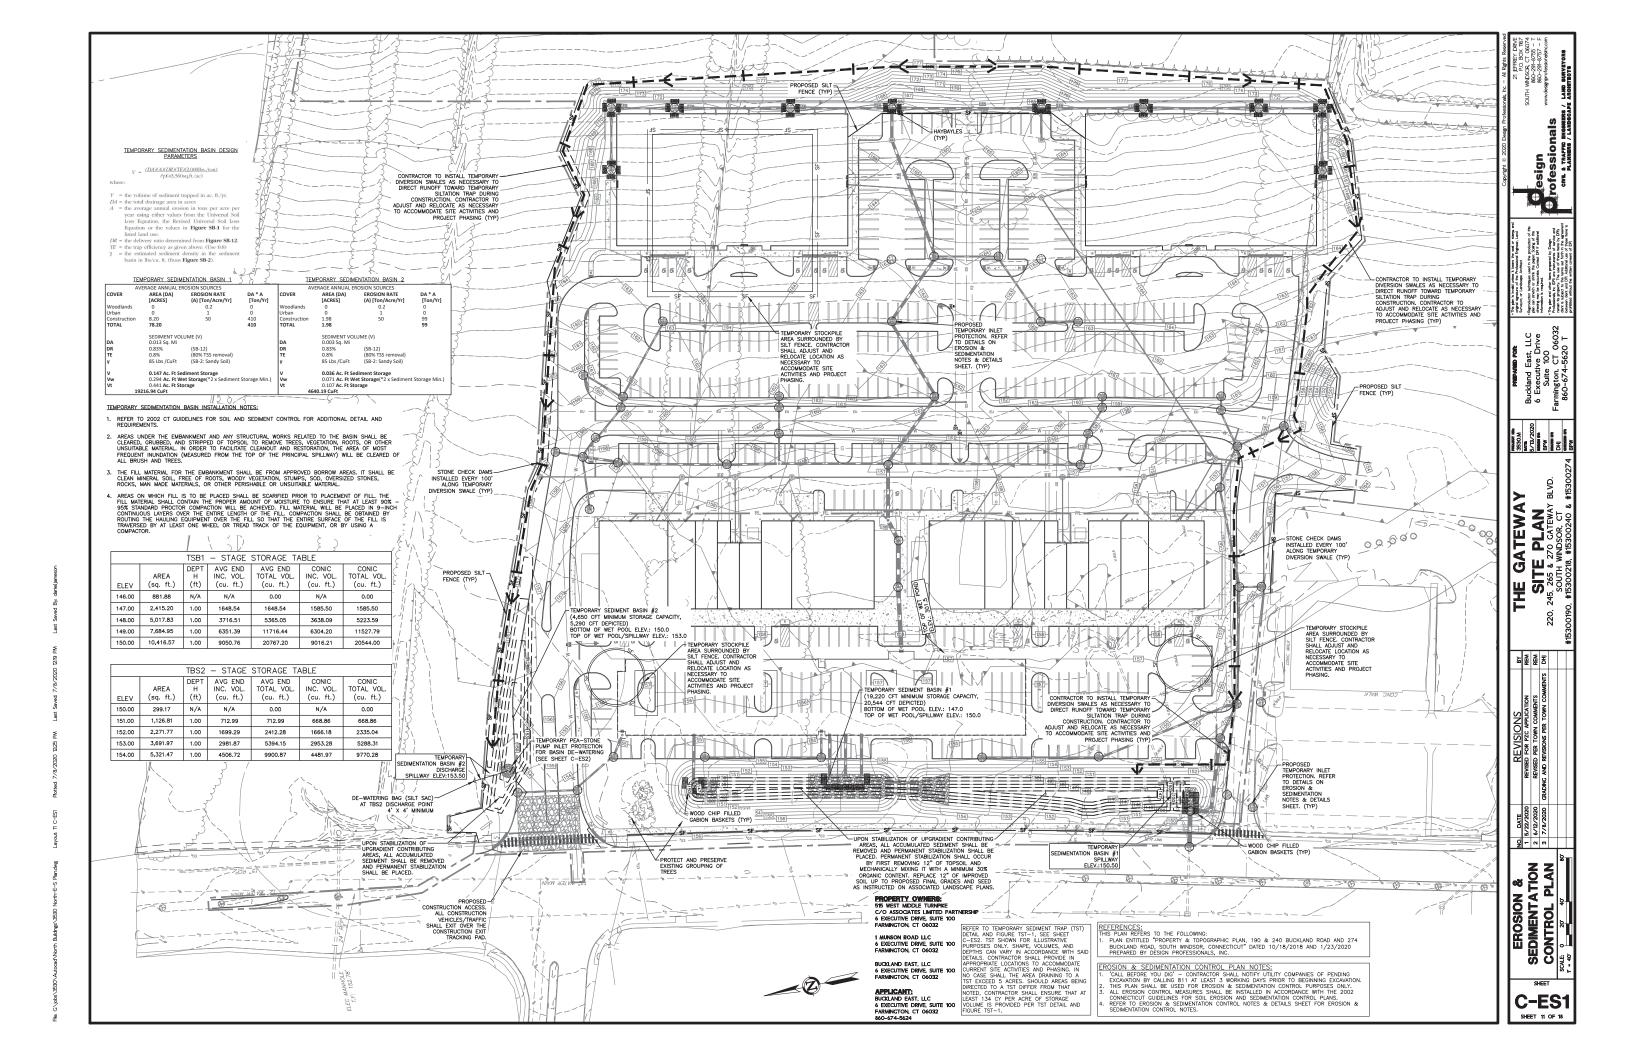


-4" ADS N-12 (PUMP TO BASIN SPILLWAY) (SEE NOTE 1) SIMILAR MESH THICK LAYER OF RIP RAP O THICK LATER OF RIP RAP
CONSISTING OF SOUND, TOUGH,
DURABLE AND ANGULAR ROCK,
PLACED OVER GEOTEXTILE. MAXIMUM
RIPRAP SIZE TO BE 4 INCHES AND
NOT MORE THAN 10% LESS THAN 2 NOTES:

1. INSPECT CONSTRUCTION EXIT WEEKLY
AND AFTER EVERY MAJOR STORM EVENT
2. WASH WATER, IF USED SHALL BE
DIRECTED TOWARDS A SEDIMENT SIZED
FOR SITE CONDITIONS. NOTES: 1. ALL PUMPED DISCHARGE FROM BASIN SHALL PASS THROUGH A DE-WATERING BAG (SILT SAC). THE DE-WATERING BAG SHALL BE 4' x 4' (MINIMUM). TEMPORARY SEDIMENT BASIN 3. STONE SHALL BE REMOVED/REPLACED WHEN EXCESS LEVELS OF MUD ARE DE-WATERING N.T.S. TOE OF SLOPE

2 - 2" X 2" X 3' LONG STAKES OR REBARS EACH BALE PLAN 4" STONE | 1 SECTION 18" MIN. INTO GROUND HAYBALES SHALL BE MAINTAINED AND/OR REPLACED AS REQUIRED OR AS DIRECTED BY THE ENGINEER. 2. PLACE HAYBALES SUCH THAT TWINE OR BINDING WIRE IS PARALLEL TO THE EXISTING GROUND.

STRAW BALES FOR EROSION CONTROL

 CONTRACTOR SHALL LIMIT CONTRIBUTING AREA TO DIVERSION SWALES TO 1 ACRE OR LESS, AND SHALL BE INSTALLED AT GRADES OF 2% OR LESS. COMPACTED MATERIAL

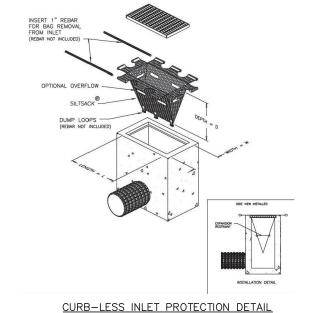

N.T.S.

FLOW

ALL DISTURBED SLOPES EXCEEDING A 3:1 SLOPE SHALL IMMEDIATELY RECEIVE MULCH AND TEMPORAR SEEDING IN ACCORDANCE WITH THE FOLLOWING APPLICATION RATES:

MULCH: STRAW 90# / 1000 S.F.

TEMPORARY SEEDING: PERENNIAL RYEGRASS RATE: 1.0# / 1000 S.F.

CONTRACTOR SHALL CLEAN CATCHBASIN SUMPS, DIVERSION SWALES, & TEMPORARY SETTLING SUMPS AS REQUIRED DURING CONSTRUCTION.

8. DURING EARTHWORK OPERATIONS, CONTRACTOR SHALL MANAGE STORMWATER RUNOFF SO THAT DIRECT DISCHARGE OF RUNOFF THAT CONTAINS SUSPENDED PARTICLES, FLOWS INTO RECEIVING WATERS, RUNOFF SHALL BE DIRECTED INTO TEMPORARY SEDIMENT SUMPS AND TREATMENT.

10. AFTER ALL SITE WORK IS COMPLETED, INCLUDING THE SPREADING OF TOPSOIL AND SEEDING, THE CONTRACTOR SHALL CLEAN ANY SILT OR DEBRIS FROM ALL STORM DRAINAGE STRUCTURES AND

14. THE CONTRACTOR SHALL DESIGNATE A WASTE DISPOSAL AREA FOR TEMPORARY STORAGE OF MATERIALS TO BE REMOVED FROM THE SITE. THE DESIGNATED WASTE AREA SHALL BE SELECTED AS TO MINIMIZE TRUCK TRAVEL THROUGH THE SITE. THE AREA MILL NOT DRAIN DIRECTLY TO ADJACENT WETLANDS. PICKUPS SHALL BE SCHEDULED REGULARLY TO PREVENT THE CONTAINERS FROM OVERFILLING. SPHLS SHALL BE CLEANED UP MIMEDIATELY. DEFECTIVE CONTAINERS HAT MAY CAUSE LEAKS OR SPHLS WILL BE IDENTIFIED THROUGH REGULAR INSPECTION. ANY FOUND TO BE DEFECTIVE.

15. ALL CHEMICAL AND PETROLEUM PRODUCT CONTAINERS STORED ON THE SITE (EXCLUDING THOSE CONTAINED WITHIN VEHICLES AND EQUIPMENT) SHALL BE PROVIDED WITH IMPERMEABLE CONTAINMENT WHICH WILL HOLD AT LEAST 110% OF THE VOLUME OF THE LARGEST CONTAINER, OR 10% OF THE TOTAL VOLUME OF ALL CONTAINMENT IN THE AREA, WHICHEVER IS LARGER, WITHOUT OVERFLOW FROM THE CONTAINMENT AREA. ALL CHEMICALS AND THEIR CONTAINERS SHALL BE STORED UNDER A ROOFED AREA EXCEPT FOR THOSE CHEMICALS STORED IN CONTAINERS OF 100 GALLON CAPACITY OR MORE, IN WHICH CASE A ROOF IS NOT REQUIRED. DOUBLE—WALLED TANKS SATISFY THIS REQUIREMENT.

18. FROZEN MATERIAL SHALL NOT BE USED FOR FILL NOR SHALL FILL BE PLACED OR COMPACTED ON FROZEN GROUND.

ESTIMATED CONSTRUCTION START DATE - SUMMER 2020 ESTIMATED COMPLETION DATE - SUMMER 2021

CONSTRUCTION DUST CONTROL NOTES

IDENTIFY AND ADDRESS SOURCES OF WIND GENERATED DUST. PROVIDE SPECIAL CONSIDERATION TO HILL TOPS AND LONG REACHES OF OPEN GROUND WHERE SLOPES MAY BE EXPOSED TO HIGH WINDS, CONSIDER BREAKING UP LONG REACHES WITH TEMPORARY WINDSREAMS CONSTRUCTED FROM BRUSH PILES, GEOTEXTILE SILT FENCES OR HAY BALES. PLAN ON STABILIZING SLOPES EARLY. MULCH FOR SEED WILL REQUIRE ANAPORMS WHEN USES.


PERIODICALLY MOISTEN EXPOSED SOIL SURFACES ON UNPAVED TRAVELWAYS TO KEEP THE TRAVELWAY

· REPEAT APPLICATION OF DUST CONTROL MEASURES WHEN FUGITIVE DUST BECOMES EVIDENT.

C/O EDDY MAJEWSKI [860-978-4293]

BUCKLAND EAST, LLC 6 EXECUTIVE DRIVE, SUITE 100

APPLICANT:
BUCKLAND EAST, LLC
6 EXECUTIVE DRIVE, SUITE 100
FARMINGTON, CT 06032
860-674-5624

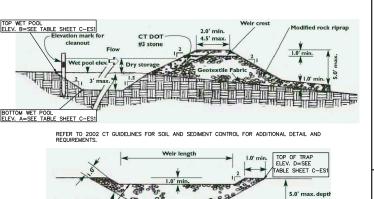

Wet pool elev.

 $Vw = 0.85 \times A_{m} \times D_{m}$ $egin{array}{ll} V_W = & \text{the wet storage volume in cubic feet} \\ A_W = & \text{the surface area of the flooded area at the base of the stone outlet in square feet} \\ D_W = & \text{the maximum depth in feet, measured from the low point in the trap to the base of the stone outlet.} \\ \end{array}$ V_d = the dry storage volume A_{tt} = the surface area of the flooded area at the base of the stone outlet in square feet. A_d = the surface area of the flooded area at the top of the stone outlet (over flow mechanism), in

VOLUME OF TST SHALL BE A MINIMUM OF 134 CUBIC YARDS PER ACRE DRAINING TO IT. HALF OF THE REQUIRED VOLUME SHALL BE FOR WET STORAGE WHILE THE OTHER HALF SHALL BE FOR DRY STORAGE. REFER TO GENERAL SIZING CALCULATIONS FOR TST BELOW

TEMPORARY SEDIMENT TRAP

N.T.S.

CONSTRUCTION SEQUENCE:

INSTALL CONSTRUCTION EXIT AT DRIVEWAYS OR OTHER LOCATIONS AS SHOWN ON PLANS. MAINTAIN THE CONSTRUCTION ENTRANCE IN A CONDITION WHICH WILL PREVENT TRACKING AND WASHING OF SEDIMENT ONTO ABUTING PAVED SURFACES, ADD STONE OR INCREASE THE LEIGHT AS CONDITIONS DEMAND. STAKE—OUT THE LIMITS OF CLEARING AND GRUBBING. INSTALL EROSION AND SEDIMENTATION CONTROL
MEASURES AT LIMITS OF CLEARING AND GRUBBING. CONTRACTOR TO CONDUCT ALL CONSTRUCTION ACTIVITIES
WITHIN LIMITS SHOWN ON PLAN.

3. CONSTRUCT TEMPORARY SEDIMENT BASINS AS SHOWN ON THE PLANS.

4. REMOVE TOPSOIL FROM AREAS OF DISTURBANCE AND STOCKPILE. POSSIBLE STOCKPILE LOCATIONS ARE SHOWN ON THE SITE PLANS. HOWEVER, LOCATIONS SHALL BE DETERMINED BY CONTRACTOR WITH APPROVAL BY THE ENGINEER & LOCAL AUTHORITY HAVING JURISDICTION. RING SOIL STOCKPILES WITH A ROW OF SILT FENCE.

ESTABLISH VEGETATION ON ALL DISTURBED SOIL THAT WILL REMAIN EXPOSED FOR LONGER THAN 30 DAYS.
SEED WITHIN 7 DAYS AFTER THE SUSPENSION OF GRADING WORK WITH A TEMPORARY SEED INICTURE PER
SECTION 5-3. VEGETATIVE SOIL COVER* OF THE "2002 CONNECTICUT GUIDELINES FOR SOIL EROSION AND

6. CREATE TEMPORARY DIVERSION SWALES AS REQUIRED.

ANY DEWATERING ACTIVITIES SHALL BE PUMPED TO TEMPORARY SILTATION BASINS AT THE TOP OF THE SLOPE, PUMPED DISCHARGE MUST UTILIZE SILT—SAC OR APPROVED EQUAL, MONITOR TO ENSURE DISCHARGE FROM BASIN IS NOT CAUSING EROSION DOWNSTREAM.

8. INSTALL STORM DRAINAGE SYSTEM. PROTECT CATCHBASINS AND CULVERT INLETS/OUTLETS WITH INLET PROTECTION AS SHOWN IN THE DETAILS.

9. INSTALL PAVEMENT, SIDEWALKS, CURBING, TOPSOIL, GRASS SEED, AND MULCH

10. AFTER STABILIZATION OF UPGRADIENT CONTRIBUTING AREAS TO THE TEMPORARY SEDIMENT BASIN, ALL ACCUMULATED SEDIMENT SHALL BE REMOVED AND PERMANENT STABILIZATION SHALL BE PLACED.

12. ALL EROSION CONTROL DEVICES SHALL REMAIN FUNCTIONAL AND IN PLACE THROUGHOUT THE CONSTRUCTION EFFORT UNTIL THE SITE IS FULLY STABILIZED WITH VEGETATION.

STORM DRAINAGE SYSTEM MAINTENANCE AND OPERATION:

THE FOLLOWING MAINTENANCE SHALL BE REQUIRED TO ENSURE EFFICIENT OPERATION OF THE STORM DRAINAGE SYSTEM, DETENTION BASIN, AND UNDERGROUND BASINS. THE MAINTENANCE SCHEDULE IS INTENDED TO BE A. GUIDE. AN INSPECTION OF ALL STORM DRAINAGE COMPONENTS IS REQUIRED FOLLOWING LARGE STORM EVENTS (0.5 INCHES OR GREATER) THAT COULD CAUSE THE DEPOSITION OF EXCESS DEBRIS.

PIPE OUTLET LOCATIONS: PIPE OUTLETS SHALL BE INSPECTED ANNUALLY AND CLEANED OF SILT AND/OR DEBRIS. RIPRAP SHALL BE RE-SHAPED AND REPLENISHED AS REQUIRED.

CATCHBASINS: SHALL BE INSPECTED ANNUALLY AND SUMPS CLEANED WHEN DEPTH OF MATERIAL REACHES TWELVE INCHES.

DETENTION BASINS: SHALL BE INSPECTED BIANNUALLY, ALL LARGE WOODY NON LANDSCAPE GROWTH THAT MAY AFFECT THE FLOW OF WATER OR THE STABILITY OF THE BASIN SHALL BE REMOVED, RIPRAP SHALL BE RE—ARRANGED AND ADDED TO AS REQUIRED, ANY EROSION OR OTHER PROBLEMS THAT MAY AFFECT THE PROPER OPERATION OF THE BASIN SHALL BE REPAIRED PROMPTLY. ACCUMULATED SEDIMENT SHALL BE REMOVED.

OUTLET STRUCTURE: SHALL BE INSPECTED ANNUALLY AND SUMP CLEANED WHEN DEPTH OF MATERIAL REACHES TWELVE INCHES. IN THE EVENT OF A MAJOR RAINSTORM, (0.5 INCHES OF RAIN OR MORE) THE OUTLET STRUCTURE SHALL BE INSPECTED TO ENSURE PROTECTIVE SCREENS ARE CLEAR OF ANY DEBRIS OR OBSTRUCTING ITEMS.

UNDERGROUND DETENTION/INFILTRATION SYSTEM: SHALL BE INSPECTED BI-ANNUALLY. REFER TO MANUFACTURING MAINTENANCE REQUIREMENTS.

WATER QUALITY UNIT: UNIT SHALL BE INSPECTED POST-CONSTRUCTION, PRIOR TO BEING PUT INTO SERVICE. INSPECT EVERY SIX MONTHS FOR THE FIRST YEAR OF OPERATION TO DETERMINE THE COLL AND SEDMENT ACCUMULATION PATE. IN SUBSEQUENT YEARS, INSPECTIONS, CAN BE BASED ON FIRST-YEAR OBSERVATIONS OR LOCAL REQUIREMENTS. CLEANING IS RECOMMENDED ONCE THE SEDMENT DEPTH PREACHES 15% OF STORAGE CAPACITY, (GENERALLY TAKING ONE YEAR OR LONGER). REFER TO MANUFACTURING MAINTENANCE REQUIREMENTS.

EROSION & SEDIMENTATION CONTROL MAINTENANCE AND INSPECTION PROGRAM (WEEKLY CONSTRUCTION REPORTS):

PER RECOMMENDATIONS MADE IN THE 2002 CONNECTICUT GUIDELINES FOR SOIL EROSION AND SEDIMENTATION CONTROL PLAN, THE CONTRACTOR SHALL MAINTAIN WEEKLY REPORTS ON THE CONDITION OF ALL EROSION CONTROL MESAURES AND MAKE THEM AVAILABLE UPON REQUEST OF OWNER, LOCAL AUTHORITY HAVING JURISDICTION, OR ENGINEER, IN THE EVENT OF A MAJOR RAINSTORM, (0.5 INCHES OR GRATER) REPORTS SHALL BE PREPARED WITHIN 24 HOURS OF SAID EVENT.

EROSION & SEDIMENTATION CONTROL NARRATIVE

PRIOR TO THE START OF CONSTRUCTION, ALL EROSION CONTROL DEVICES SHALL BE INSTALLED IN CONFORMANCE WITH THESE PLANS.

 CONTRACTOR IS RESPONSIBLE FOR IMPLEMENTATION OF ALL SEDIMENTATION AND EROSION CONTROL MEASURES SHOWN ON THESE PLANS. THIS RESPONSIBILITY INCLUDES IMPLEMENTATION AS WELL AS MAINTENANCE. ANY PROPOSED CHANGES TO THIS PLAN MUST BE APPROVED BY THE ENGINEER AND/OR THE LOCAL AUTHORITY HAVING JURISDICTION.

CONSTRUCTION ACCESS SHALL BE INSPECTED REGULARLY TO ENSURE PROPER OPERATION. STONE SHALL BE ADDED OR REPLACED AS REQUIRED.

COMPLETED PORTIONS OF THE PROJECT) FREE FROM ACCUMULATED DUST AND DIRT. STREETS SHALL BE SWEPT CLEAN AT ALL TIMES.

5. AREAS WHERE CONSTRUCTION ACTIVITIES HAVE PERMANENTLY CEASED OR WHEN FINAL GRADES ARE REACHED IN ANY PORTION OF THE SITE, SHALL BE STABILIZATION WITH FINAL VEGETATION WITHIN 7 DAYS, AREAS TO BE LEFT BARE FOR MORE THAN 30 DAYS SHALL BE TREATED WITH AIR ORIED WOOD CHIP MULCH (6 CYDS / 1000 S.F.) OR SEEDED WITH PERCHNIAL RYE-GRASS UNTIL FINAL GRADING AND STABILIZATION TAKES PLACE WITHER STABILIZATION SHALL INCLUDE WILLOCYSTRAW OR TAM APPLED AT THE SAME RATE WITH A TACKFIER PER RECOMMENDATIONS MADE IN THE 2002 CONNECTICUT GUIDELINES FOR SOIL EROSION AND SEDMENT CONTROL

MIN. 3' -GABION BASKET TO BE FILLED WITH WOOD CHIPS

-GABION BASKET TO BE EMBEDDED AT LEAST 6" BELOW GRADE GABION WOOD CHIP DIKE

N.T.S.

TEMPORARY DIVERSION SWALE N.T.S.

S 68 8 8

esiç O rofes

East, LLC Ive Drive 100 CT 0603 -5620 T

353C 5/T3, BPW BPW BPW

BLVD.

4

⋛

ᄩᇻ

ĮŠ ⊒į

| |S |S

FE REM

DATE 5/22/2020 6/12/2020 7/8/2020

N & ATION NOTES

EROSION SEDIMENT/ DETAILS &

AT NO TIME DURING THE CONSTRUCTION EFFORT SHALL THERE BE ANY OPEN AND DISTURBED AREA GREATER THAN 5 ACRES WITHOUT SILT FENCE PERIMETER OF SET AREA.

11. AT ALL TIMES DURING THE CONSTRUCTION EFFORT, THE CONTRACTOR SHALL HAVE AVAILABLE THE APPROPRIATE COUPMENT FOR WATER APPLICATION FOR THE PURPOSES OF ALLAYING DUST, APPLY WATER, SUITABLE MATERIALS, OR COVERS TO MATERIAL STOCKPILES AND OTHER SURFACES THAT CAN GIVE RISE TO AIRBORNE PARTICULATE WATTER, COVER, WHILE IN MOTION, OPEN-BODIED TRUCKS OR OPEN-BODIED TRALLESS, MINIMIZE THE VOLUME OF WATER SPRAYED FOR CONTROLLING DUST AS TO PREVENT THE RUNOFF OF WATER, NO DISCHARGE OF DUST CONTROL WATER SHALL CONTAIN OR CAUSE A VISITED OIL SHEEN, FLOATING SOLIDS, VISIBLE DISCOLORATION, OR FOAMING IN THE RECEIVED STEAM.

12. THE DEVELOPER SHALL ENSURE THAT CONSTRUCTION ACTIVITIES COMPLY WITH THE NOISE ORDINANCES OF THE AUTHORITY HAVING JURISDICTION.

13. THE CONTRACTOR SHALL EXCAVATE A PIT TO BE DESIGNATED AS A WASHOUT AREA FOR CONCRETE, PAINT, AND OTHER MATERIALS. THIS AREA SHALL BE CLEARLY FLAGGED AND CONSTRUCTED TO BE ENTRELY SELF-CONTAINED. THIS RAFE SHALL BE OUTSIDE OF ANY BUFFERS AND AT LEAST 50 FEET FROM ANY STREAM, WETLAND, OR OTHER SENSITIVE SOURCE. DUMPING OF LIQUID WASTES IN STORM SEWERS IS PROHIBITED. THE WASHOUT AREA SHALL BE INSPECTED AT LEAST ONCE A WEEK TO ENSURE STRUCTURAL INTEGRITY, ADECUATE HOLDING CAPACITY, AND TO CHECK FOR LEAKS AND WASTE STRUCTURAL INTEGRITY, ADECUATE HOLDING CAPACITY, AND TO CHECK FOR LEAKS AND WASTE LILQ OR IS DESIGNED INCESSARY TO AVOID OFFORE OWN.

WILL BE REPAIRED OR REPLACED IMMEDIATELY. ANY STOCKPILING OF MATERIALS SHOULD BE CONFINED TO THE DESIGNATED AREA AS DEFINED BY THE CONTRACTOR.

16. CONTRACTOR SHALL COORDINATE WITH THE PROPER AGENCIES FOR RELOCATION OF ANY UTILITIES OR

17. IF REQUIRED, AN APPROVED EROSION CONTROL BOND SHALL BE PREPARED BEFORE THE START OF ANY CONSTRUCTION ACTIVITY.

IDENTIFY AND ADDRESS SOURCES OF DUST GENERATED BY CONSTRUCTION ACTIVITIES. LIMIT CONSTRUCTION TRAFFIC TO PREDETERMINED ROUTES, PAVED SURFACES REQUIRE MECHANICAL SWEEPERS TO REMOVE SOIL THAT HAS BEEN DEPOSITED OR TRACKED ONTO THE PAVEMENT. ON UNPAVED TRAVELWAYS AND TEMPORARY HAUL ROADS, USE ROAD CONSTRUCTION STABILIZATION MEASURES AND/OR MATER AS NEEDED TO KEEP SURFACE DAMP. STATIONARY SOURCES OF DUST, SUCH AS ROCK CRUSHERS, USE FINE WATER SPRAYS TO CONTROL DUST. IF WATER IS EXPECTED TO BE NEEDED FOR DUST CONTROL, IDENTIFY THE SOURCE OF WATER IN ADVANCE. PUMPING FROM STREAMS, POND AND SIMILAR WATERBODIES MAY REQUIRE APPROVAL FROM THE MUNICIPAL INLAND WETLAND GENCY.

CONSIDER WATER QUALITY WHEN SELECTING THE METHOD AND/OR MATERIALS USED FOR DUST CONTROL. WHEN CONSIDERING THE USE OF CALCIUM CHLORDIE, BE AWARE OF THE FOLLOWING: THE RECEINING SOILS PERMEABILITY SO AS TO PREVENT GROUNDWATER CONTAINATION; THE TRIMING OF THE APPLICATION TO RAINFALL TO PREVENT WASHING OF SALTS INTO SENSITIVE AREAS SUCH AS WETLANDS AND WATERCOURSES; AND PROXIMITY TO SENSITIVE AREAS SUCH AS WATEROURSES; PONDS, ESTABLISHED OR SOON TO BE ESTABLISHED AREA OF PLANTINGS, WHERE SALTS COULD IMPAIR OR DESTROY PLANT AND ANIMAL LIFE. ADDITIONALLY, SOME MATERIALS USED FOR DUST CONTROL MAY BE RENDERED INEFFECTIVE BY DEGRADED WATER QUALITY IF IT IS USED FOR MIXING.

CONSIDER USING DUST CONTROL MEASURES ONLY AFTER IT IS DETERMINED THAT OTHER MEASURES FOR SOIL STABILIZATION CANNOT BE PRACTICALLY APPLIED.

USE MECHANICAL SWEEPING ON PAVED AREAS WHERE DUST AND FINE MATERIALS ACCUMULATE AS A RESULT OF TRUCK TRAFFIC, PAVEMENT SAW CUTTING SPILLAGE, AND WIND OR WATER DEPOSITION FROM ADJACENT DISTURBED AREAS. SWEEP DAILY IN HEAVILY TRAFFICKED AREAS.


NON-ASPHALTIC SOIL TACKFIER CONSISTS OF AN EMULSIFIED LIQUID SOIL STABILIZER OF ORGANIC, NORGANIC OR MINERAL ORIGIN, INCLUDING, BUT NOT LIMITED TO THE FOLLOWING: MODIFIED RESINS, CALCIUM CHOORIDE, COMPLEX SURFACTANT COPOLYMERS OR HIGH GRADE LATEX ARRYLLOS. THE SOLLITIONS SHALL BE NONASPHALTIC, NONTOXIC TO HUMAN, ANIMAL AND PLANT LIFE, NONCORROSIVE AND NONEMAMBLE. MATERIALS USED SHALL MEET LOCAL, STATE AND FEDERAL GUIDELINES FOR INTENDED USE. ALL MATERIALS ARE TO BE APPLIED ACCORDING TO THE MANUFACTURERS RECOMMENDATIONS AND ALL SAFETY GUIDELINES SHALL BE FOLLOWED IN STORING, HANDLING AND APPLYING MATERIALS.

PROJECT CONTACT INFO:

PROPERTY OWNERS: 515 WEST MIDDLE TURNPIK

1 MUNSON ROAD LLC

C-ES2 SHEET 12 OF 18

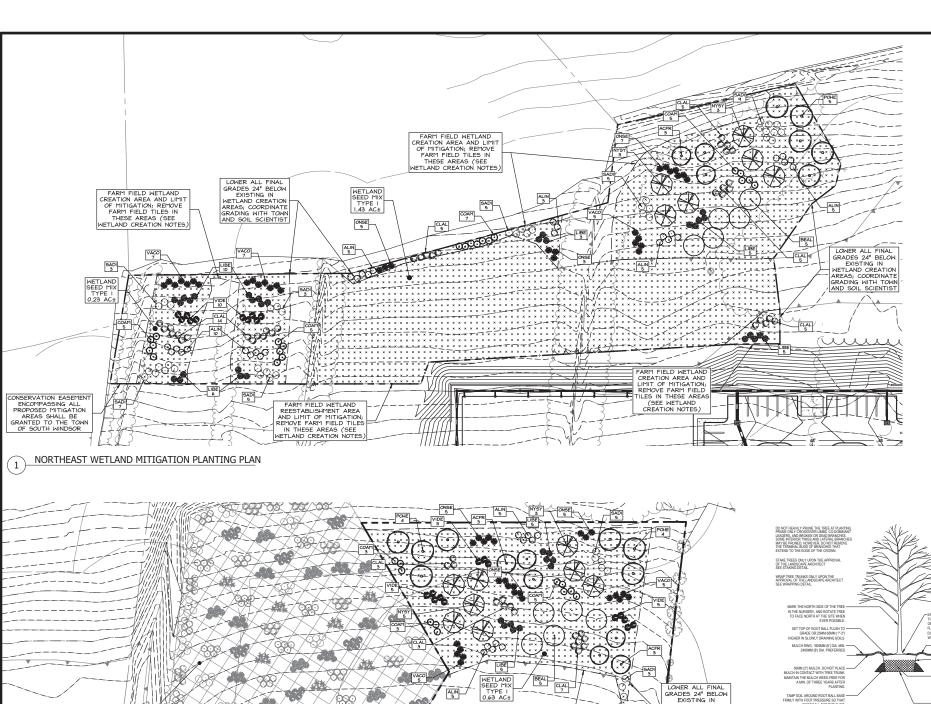

FARM FIELD WETLAND
CREATION AREA AND LIMIT
OF MITIGATION; REMOVE
FARM FIELD TILES IN
THESE AREAS (SEE
WETLAND CREATION NOTES)

LANDSCAPE NOTES:

- TEAR AFTER FINAL ACCEPTANCE OF ENTIRE PRODUCT TO THE PATH AND URBATTER FORCET GROWN IN ECRIPT FOR DEFECTS OF THE AND URBATTER CAPTOR CONTROL OF THE PATH AND URBATTER CAPTOR CONTROL OF THE PATH AND EPILACE TIPES, SHIENDS, OR CHIEF CONTROL OF THE PATH AND EPILACE TIPES, SHIENDS, OR CHIEF CONTROL OF THE PATH AND EPILACE TIPES, SHIENDS, OR CHIEF CONTROL OF THE PATH AND EPILACE TIPES, SHIENDS, OR CHIEF CAPTOR CONTROL OF THE PATH AND EPILACE TIPES. AND SHIPES SHICK ARE IN DOUBTH CONTROL OF THE PATH AND EPILACE TIPES. AND SHIPES SHICK ARE IN DOUBTH CONTROL OF THE PATH AND EPILACE TIPES. AND SHIPES SHICK ARE IN TO SHIP THE CONTROL OF THE PATH AND EPILACE TO SHIP THE PATH EP

WETLAND SEED MIX:

SEEDING MIXTURE TYPE I (METLAND CREATION AREA)
OBL-FACH PERDNIAL FOOD 4 COVER METLAND MIX - ERNYX-120
SY Errat Cornervotion Seeds, 9000 Ferter Pilo, Piecoville, PA 16356
(200) PEPLICATION RATE: 0.50 LBS PER 1,000 S.F., 20 LBS PER
ACRE

- GMAITTIES, AND OTHER REQUIREMENTS IS SHOWN ON THE

 DANNINGS. THE INVENT FOR INTERPRETATION OF THE PRAINTIES AND THE INVENT FOR INTERPRETATION OF THE PRAINTIES AND SOLUTION IN THE PLANT THATERIALS LIST, THE

 PLANTING FLAME SHALL GOVERN EAR THE HIMPURY SIZE INDICATED

 ON THE PRAINTIES, LARGER STOCK IS ACCEPTABLE AT NO
 ADDITIONAL COST AND PROVIDING THE LARGER PLANTS HILL NOT BE

 ON PRINNING HOUNDS SHALL BE PRESENT WITH A DIMHETER OF HORE

 THAIL INCH AND SUCH KNOWLD HILD THAN VOCKOOUS BARK ON ALL

 RATTITISANSPIRANT. PROVIDE PROTECTIVE FILH BRUSON PROVIDING

 A PROTECTIVE FILM OVER PLANT SHATE OF EAR OF ALL

 ANTITISANSPIRANT. PROVIDE PROTECTIVE FILH BRUSON PROVIDING

 A PROTECTIVE FILM OVER PLANT SHATE IS CLEAN, FREE FROM

 HATER IS TO BE SUPPLIED FOR PLANTS THAT IS CLEAN, FREE FROM

 HATER IS TO BE SUPPLIED FOR PLANTS THAT SOLUTIONS.

 AND THE SUBSTIANCES HARMFUL TO PLANTS, ORGANIC PARTITION,

 OTHER SUBSTIANCES HARMFUL TO PLANTS, ORGANIC PARTITION,

 OTHER SUBSTIANCES HARMFUL TO PLANTS, ORGANIC PARTITION,

 OTHER SUBSTIANCES HARMFUL TO PLANTS, ORGANIC PARTITION,

 BRANCHES FLUSH AT THE BRANCH COLLAR WITH THE TRINK OR

 PAULIFIEL ELABOR PLANTS THAT PRESERVE THE CONTRACTOR PROVIDED FOR THE CHITCH ALL PROVIDED FOR THE CHITCH ALL PROVIDED FOR THE CHITCH ALL PROVIDED FOR THE PROVIDED FOR THE CHITCH ALL PROVIDED FOR THE PROVIDED FOR THE CHITCH ALL PROVIDED FOR THE PROVIDED FOR THE CHITCH ALL PROVIDED FOR THE PROVIDED FOR T


WETLAND CREATION AREA NOTES:

- CONTRACTOR TO LOCATE AND REMOVE ALL EVISTING FARM FIELD TILES FRIOR TO ANY HETLAND CREATION OR RESTORATION FLANTINGS. ALL CONSTRUCTION EQUIPMENT UTILIZED IN THIS AREA SHALL HIMMIZE COPPACTION AS FINCED AS POSSIBLE.

 COPPACTION AS FINCED AS FOSSIBLE.

 WEITLAND CREATION AREAS FOR EVISTING MUTINI THE FARM FIELD PRESTAND AREAS FOR EVISTING GRADE STOCKPIELD BEYOND THE LITHTS OF HETLANDS. IN THE FARM FIELD RESTAULISHMENT AREA, EXISTING GRADE SHALL BE MAINTAINED AND ATRIPEDED HINT THE VISTING FOR SHALL BE MAINTAINED AND ATRIPEDED HINT FOR HETLAND CREATION AREA. TO THE METLAND CREATION AREA TO METLAND TO BE DISTURBED. MINITURE IN METLAND CREATION AREA TO A HINHWIND HETPH OF 12", NO FETILIZER OR LITTLE SHALL BE APPLIED. SEED BITIES AREA HITH METLAND GREESEED PRETOR OF YEAR. VERYLEY AND THE METAND CREATED HINTON FOR SUPPLIER'S PRITTEN MINITURCINGS AND HITHIN SUGGESTED PRETOR OF YEAR.

 AREA TO SHALL AND MARCH IT ON HANDAIN A MET MEADON,

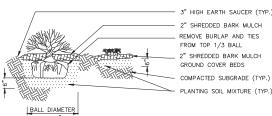

(4) SHRUE

		WETLAND P	LANTING SCH	EDULE	=	
KEY	QTY	BOTANICAL NAME	COMMON NAME	SIZE	TYPE	NOTES
TREES			•			
ACFR	9	Acer x. freemanii 'Jeffer's Red'	Autumn Blaze Maple	Sapling	B&B	PLANT AS SHOWN
BEAL	10	Betula alleghaniensis	Yellow Birch	Sapling	B&B	PLANT AS SHOWN
NYSY	14	Nyssa sylvatica 'Wildfire'	Wildfire Black Tupelo	Sapling	B&B	PLANT AS SHOWN
POHE	13	Populus heterophylla	Swamp Cottonwood	Sapling	B&B	PLANT AS SHOWN
QUBI	3	Quercus bicolor	Swamp White Oak	Sapling	B&B	PLANT AS SHOWN
SABA	3	Salix babylonica	Weeping Willow	Sapling	B&B	PLANT AS SHOWN
SHRUBS						
ALIN	38	Alnus incana	Speckled Alder	No. 2	CONT.	6' O.C.
CLAL	55	Clethra alnifolia	Sweet Pepperbush	No. 2	CONT.	6' O.C.
COAM	31	Cornus amomum	Silky Dogwood	No. 2	CONT.	6' O.C.
LIBE	45	Lindera benzoin	Spice Bush	No. 2	CONT.	6' O.C.
SADI	50	Salix discolor	Pussy Willow	No. 2	CONT.	6' O.C.
VACO	29	Vaccinium corymbosum	High Bush Blueberry	No. 2	CONT.	6' O.C.
VIDE	23	Viburnum dentatum	Arrowwood Viburnum	No. 2	CONT.	6' O.C.
HERBACE	ous					
ONSE	32	Onoclea sensibilis	Sensitive Fern	No. 1	CONT.	5' O.C.

1 MUNSON ROAD LLC 6 EXECUTIVE DRIVE, SUITE 100 FARMINGTON, CT 06032

LOWER ALL FINAL
GRADES 24 BELOW
EXISTING IN
WETLAND CREATION
AREAS; COORDINATE
GRADING WITH TOWN
AND SOIL SCIENTIST

CLAL

BUCKLAND EAST, LLC 6 EXECUTIVE DRIVE, SUITE 100

APPLICANT: BUCKLAND EAST, LLC 6 EXECUTIVE DRIVE, SUITE 100 FARMINGTON, CT 06032 860-674-5624

NO MULCH WITHIN 3" OF TREE TRUNK
 THIS DETAIL ASSUMES THAT THE PLANTING SPACE IS LARGER THAN 2400 MM.
 (8 FT.) SQUARE, OPEN TO THE SKY, AND NOT COVERED BY ANY PAVING OR GRATING.

3 TREE PLANTING DETAIL

REFERENCES:
THIS PLAN REFERS TO THE FOLLOWING:
HIS PLAN RETIRED *PROPERTY & TOPOGRAPHIC PLAN, 190 & 240 BUCKLAND ROAD AND 274
BUCKLAND ROAD, SOUTH WINDSOR, CONNECTICUT* DATED 10/18/2018 AND 1/23/2020
PREPARED BY DESIGN PROFESSIONALS, INC.

LANDSCAPE PLAN NOTES:

1. "CALL BEFORE YOU DIG" — CONTRACTOR SHALL NOTIFY UTILITY COMPANIES OF PENDING EXCAVATION AT OR NEAR PUBLIC UTILITIES. CALL 811 AT LEAST 72 HOURS PRIOR TO BEGINNING EXCAVATION.

2. THIS PLAN SHALL BE USED FOR LANDSCAPING ONLY

3. REFER TO NOTES SHEET FOR LANDSCAPING AND SEEDING NOTES

B & GROUNDCOVER PLANTING DETAIL Not to Scale FILAND PLANTING SCHEDULE FILAND PLANT AS SHOWN Not to Scale FILANT AS SHOWN NOT AS A SHOWN NOT AS A SHOWN SHOWN
TLAND PLANTING SCHEDULE FAL NAME COMMON NAME SIZE TYPE NOTES THE COMMON NAME SIZE TYPE NOTES SIZE TYPE NO
incana Speckled Alder No. 2 CONT. 6' O.C.
incana Speckled Alder No. 2 CONT. 6' O.C. alnifolia Sweet Pepperbush No. 2 CONT. 6' O.C.
amomum Silky Dogwood No. 2 CONT. 6' O.C.
amomum Silky Dogwood No. 2 CONT. 6' O.C. p benzoin Spice Bush No. 2 CONT. 6' O.C.
amomum Silky Dogwood No. 2 CONT. 6' O.C.
abylonica Weeping Willow Sapling B&B PLANT AS SHOWN

WETLAND MITIGATION PL

esign Professio

5/13/ 9PW BPW

BLVD.

C-LS1 SHEET 13 OF 18

SOUTHEAST WETLAND MITIGATION PLANTING PLAN

- It is the contractor's responsibility to review all construction contract documents associated with the project scope of work, including, but not limited to, all drawings and specifications, architectural plans, boundary and topographic survey, wetlands assessment and reports, geotechnical reports, environmental reports, and approval conditions, prior to the commencement of constructions. Desirable has personate for confirming the prospection of the contractor of the contractor. of construction. Should the contractor find conflict and/or discrepancy between the documents relative to the plans, specifications, reports, or the relative or applicable codes, regulations, laws, rules, statutes and/or ordinances, it is the contractor's sole responsibility to notify the Engineer, in writing, of said conflict and/or discrepancy prior to the start of construction
- approval placed on the project by the authorities having jurisdiction
- Occupational Safety and Health (OSHA) standards and regulations, and/or any other agency with jurisdiction for construction activities. The contractor is solely responsible for construction means, methods, techniques, sequences or procedures, or for safety precautions and programs in connection with work on the Project. The Engineer will not be responsible for the work on the Project. The Engineer will not be responsible for the controctor's actify, schedules, or failure to carry out its work in accordance with the contract documents. The Engineer will not have control over or charge of acts or omissions of the contractor, subcontractors, or their agents or employees, or of any persons performing portions of work on the Project.
- 5. Contractor must notify the Engineer in writing if there are any questions concerning the accuracy or intent of these plans or related specifications. If such notification is given, no demolition or site activity may begin until such time that the Engineer provides a written response to same.
- 6. Contractor shall adhere to and is responsible for compliance with all details contractor shall durier to an its responsible for compliance with all details notes, plans and specifications contained herein. It is the responsibility of the contractor to ensure that all work performed by their subcontractors is in full compliance with these requirements.
- The contractor shall confirm that they are in receipt of the current version of the referenced documents prior to the commencement of any work.
- Prior to commencing work, the contractor shall review and correlate al consultants plans and specifications including the entire site plan and rnor to commencing work, the contractors and review and correlate all consultants plans and specifications including the entire site plan and the latest architectural plans (including, but not limited to, structural, mechanical electrical, plumbing, and fire suppression plans, where applicable), in particular for building utility connection locations, grease trap requirements, details, door access, and exterior grading. Contractor must immediately notify the Architect and the Engineer, in writing, of any conflicts, discrepancies or ambiguities which exist, and receive a written resolution prior to commencing
- Prior to commencing work, contractor is required to secure all necessary Prior to commencing work, contractor is required to secure all necessary and/or required permits and approvals for the construction of the project, including, but not limited to, demolition work, and all off site material sources and disposal facilities. Copies of all permits and approvals shall be maintained on site throughout the duration of the project. The contractor shall thoroughly review and understand all permits and permit conditions prior to fabrication of any materials or products to be used as and of the project.
- 10. The contractor is responsible for independently verifying all existing onsite utilities within and adjacent to the limits of the project activities. Underground utility, structure and facility locations depicted and noted on the plans have been compiled, in part, from record mapping supplied by the respective utility companies or governmental agencies, from parol testimony, and from other sources. These locations must be considered as approximate in nature. Additionally, other such features may exist on the site, the existence of which are unknown to the Engineer.
- 11. The contractor is responsible for ensuring the installation of all improven comply with all requirements of utility companies with jurisdiction and/or
- Locations of all existing and proposed services are approximate. Final utility service sizes and locations, including, but not limited to, the relocation and/or installation of utility poles, or the relocation and/or installation of transformers, are at the sole discretion of the respective utility companies.
- 13. Prior to commencement of any work, the contractor shall independently coordinate and confirm with the appropriate utility companies to finalize all utility services and/or relocations to ensure no conflict with the design plans utility services and/or relocations to ensure no connect with the design prion and that proper depths can be achieved. All discrepancies must immediate be reported to the Engineer in writing. Should a conflict arise due to the final designs of the utility company, the contractor shall notify the Engineer in writing and await a written resolution prior to proceeding with further utility installations.
- 14. Prior to commencing construction, the contractor shall field verify all existing conditions, topographic information, utility invert elevations, and proposed layout dimensions, and must immediately notify the Engineer in writing if actual site conditions differ or are in conflict with the proposed work. No extra compensation will be paid to the contractor for work which has to be redone or repaired due to dimensions or grades shown incorrectly on these plans unless the contractor receives written permission from Owner/developer plans unless the contractor receives written permission fr giving authorization to proceed with such additional work.
- the elevations of the existing utilities shall be verified in the field prior to construction by excavating a test pit at the proposed utility crossing point. Should the field verified existing utility be in conflict with the proposed site designs, the contractor shall notify the Engineer in writing and shall not proceed with said utility construction until further direction is given from the
- 16. At least 72 hours prior to starting any site activity or demolition, the contractor shall notify, at a minimum, the building official, municipal engineer, department of public works, planning and zoning commission, the Engineer, and local inland wetland commission, as applicable. The contractor shall also attend a pre-construction meeting with the local municipality, if required, prior to commencing any site activity or demolitio
- 17. Prior to starting any site activity or demolition, the contractor shall implement the soil erosion and sediment control measures as noted on the plans. Refer to the Erosion and Sedimentation Control Notes.
- 18. The demolition plan or existing features designated to be removed are intended to provide only general information regarding items to be demolished and/or removed. The contractor shall review all site plans (and architectural drawings as applicable) to assure that all demolition activities and incidental work necessary for the construction of the new site improvements are completed.
- . The contractor shall protect and maintain the operation and service of all active utilities and systems that are not being removed during all construction activities. Should a temporary interruption of utility services be required as part of the proposed construction activities, the contractor shall coordinate with appropriate utility companies and the affected end users to minimize impact and service interruption.

- 20. The contractor shall arrange for and coordinate with the appropriate utility companies for all services that require temporary or permanent termination for the project, whether shown on the site plans or not. Termination of utilities shall be performed in compliance with all local, state and/or federal
- Contractor must prepare record drawings depicting the location of existing utilities that are capped, abandoned in place, or relocated and provide to the Owner and the Engineer of record.
- 22. Should hazardous material be discovered/encountered, which was not anticipated/addressed in the project plans and specifications, cease all work immediately and notify Owner and Engineer regarding the discovery of same. Do not continue work in the area until written instructions are received from an environmental professional.
- 23. The contractor is responsible for preventing movement, settlement, damage, or collapse of existing structures, and any other improvements that are to remain. If any existing structures that are to remain are damaged during construction, repairs shall be made using new product/materials resulting in a pre-damage condition, or better. Contractor is responsible for all repair costs. Contractor shall document all existing damage and to notify the Owner prior to the start of construction.
- 24. The use of explosives, if required, must comply with all local, state and federal regulations. The contractor shall obtain all permits that are required by the federal, state and local governments, and shall also responsible for all notification, inspection, monitoring or testing as may be required.
- 25. All debris from removal operations must be removed from the site at the Air ceutra nom reinatur operatura mass are entreed in not the site at the time of excountion. Stockpling of demolition debris will not be permitted. Debris shall not be burned or buried on site. All demolition materials to be disposed of, including, but not limited to, stumps, limbs, and brush, shall be done in accordance with all municipal, county, state, and federal laws and applicable codes. The contractor must maintain records of all disposal
- 26. The contractor is responsible for repairing all damage to any existing utilities during construction, at its own expense
- 27. All new utilities/services, including electric, telephone, cable tv. etc. are to be shall be responsible for installing all new utilities/services in accordance wit the utility/service provider's written installation specifications and standards.
- and specifications and the recommendations set forth in the geotechnical report completed for this project. In the absence of a geotechnical report all earthwork activities must comply with the standard state Department o Transportation (DOT) specifications (latest edition) and any amendments or revisions thereto. All earthwork activities must comply all applicable ents, rules, statutes, laws, ordinances and codes for the jurisdictions where the work is being performed.
- 29. The contractor is responsible for removing and replacing unsuitable materials with suitable materials. All excavated or filled areas must be properly compacted. Moisture content at time of placement must be submitted in a compaction report prepared by a qualified geotechnical engineer, licensed in the state where the work is performed, verifying that all filled greas and subgrade greas within the building pad grea and greas to be paved have been compacted in accordance with these plans, specifications and the ndations. Subbase material for building pads, sidewalks, curb. of asphalt must be free of organics and other unsuitable materials. Should aspnat must be free of organics and other unsuitable materials. Should subbase be demed unsuitable by Owner/developer or Owner/developer's representative, subbase is to be removed and filled with suitable material and properly compacted at the contractor's expense. All fill, compaction, and backfill materials required for utility installation must be coordinated with the applicable utility company specifications. The Engineer shall have no liability or responsibility for or as related to fill, compaction, backfill, or the balancing of earthwork. oalancing of earthwork
- depth of the existing pavement, except for edge of butt joints.
- The tops of existing manholes, inlet structures, and sanitary cleanout tops must be adjusted as necessary, to match proposed grades.
- 32. Where retaining walls (whether or not they meet the jurisdictional definition) are identified on plans, elevations identified herein are for the exposed portion of the wall. Wall footing/foundation elevations are not identified

Reinforced Concrete pipe (RCP) shall meet the requirements of AASHTO M 170 Class IV with silt tight joints.

High-Density Polyethylene pipe (HDPE) shall conform to AASHTO M 294, Type S (smooth interior with angular corrugations)

Polyvinyl chloride (PVC) pipe for roof drain connections shall be SDR 35 gasket pipe. Polyvinyl Chloride (PVC) pipe for sanitary sewer pipe shall be SDR 35 gasket pipe.

- 34. Storm sewer pipe lengths indicated are approximate and measured to the inside of inlet and/or manhole structure. Sanitary sewer pipe lengths
- 35. Stormwater roof drain locations are approximate and are based on preliminary architectural plans. Contractor is responsible for reviewing and coordinating the final architectural plans to verify final locations and sizes of all roof drains.
- 36. Sewers crossing streams and/or location within 10 feet of the stream embankment, or where site conditions so indicate, must be constructed of steel, reinforced concrete, ductile iron or other suitable material. Sewers conveying sonitary flow, combined sonitary and stormwater flow or industrial flow must be separated from water mains by a distance of at least 10 feet norizontally. If such lateral separations are not possible, the pipes must be in separate trenches with the sewer at least 18 inches below the bottom o in separate trenches with the sever at least 18 inches below the bottom of the water main, or such other separation as approved by the agency with jurisdiction over some. Where appropriate separation from a water main son to possible, the sever must be encosed in concrete, or constructed of ductile iron pipe using mechanical or slip-on joints for a distance of at least 10 feet on either side of the crossing, in addition, one full length of sewer pipe should be located so both joints will be as far from the water line as possible. Where a water main crosses under a sewer, adequate structural support for the sewer must be provided.
- 37. Contractor's price for water service must include all fees, costs and appurtenances required by the utility to provide full and complete working
- 38. Contractor must contact the applicable water company to confirm the prope water meter and vault, prior to commencing construction. Water main and water service piping shall be installed in accordance with the requirements and specifications of the water authority having jurisdiction. In the absence of such specifications, water main piping must ductile iron (DIP) minimum Class 54. All work and materials must comply with the applicable American


Water Works Association (AWWA) standards in effect at the time of the service application

- 39. The contractor shall ensure that all work located in existing pavement be repaired in accordance with municipal, county and/or DOT details as applicable. Contractor is responsible to coordinate the permitting, inspection and approval of completed work with the agency having jurisdiction over the
- Where sump pumps are installed, all discharges must be connected to the storm sewer or discharged to an approved location.
 For single and multi-family residential projects, spot elevation(s) adjacent to the buildings are schematic for non-specific building footprints. Grades must be adjusted based on final architectural plans and shall provide a minimum of six (6) inches below top of foundation/concrete and/or six (6) inches below the façade treatment, whichever is lower, and must provide positive below the Tugude rectanient, winderee is lower, and mass provide positive drainage away from the structure (minimum of 2%). All areas shall be graded to preclude ponding adjacent to buildings, and on or adjacent to walks/driveways leading to the buildings. All construction, including grading, must comply with all applicable building codes, local, state and federal requirements, regulations and ordinances.
- 42. Contractor shall maintain and control traffic on and offsite in conformance with the current Federal Highway Administration (FHWA) "Manual on Uniform Traffic Control Devices" (MUTCD), and the federal, state, and local regulations for all aspects of demolition and site work. If a Maintenance of Traffic Plan is required for work that affects public travel either on or offsite, the contractor shall be responsible for the cost and implementation of said plan
- 43. All temporary and permanent onsite and offsite signage and pavement markings shall conform to MUTCD, ADA, state DOT, and/or local approva
- 44. Contractor shall prevent the emission of dust, sediment, and debris from the site, and shall be responsible for corrective measures such as street sweeping, and clean—up work as deemed necessary by the Engineer or the authority having jurisdiction.
- 45. All concrete must be air entrained with a minimum compressive strength of 1,000 psi at 28 days unless otherwise specified on the plans, details and/or
- 46. The Engineer will review contractor submittals which the contractor is required to submit, but only for the sole purpose of checking for general conformance with the intent of the design and contract documents. The Engineer is not responsible for any deviations from the construction documents unless contractor received explicit direction to do so, in writing, from the Engineer. The contractor remains responsible for details and accuracy, of recontirming and correlating all quantities and dimensions, and for techniques of assembly and/or fabrication processes.
- 47. All dimensions are to face of curb, edge of pavement, or edge of building, unless noted otherwise
- 48. The contractor shall install and/or construct all aspects of the project in

AMERICANS WITH DISABILITY ACT NOTES TO CONTRACTOR:


The contractor shall review the proposed construction with the local building afficial prior to the start of construction. Contractors shall be precise in the construction of Americans with Disabilities Act (ADA) accessible parking, components, and accessible routes for the project. These components shall comply with all applicable state and local accessibility laws and regulations and the current ADA regulations and construction standards. These components include, but are not limited to the following:

- · Parking spaces and parking aisles shall not exceed a 1:50 (nominally 2.0%)
- · Accessible routes shall be a minimum of 36" wide (unobstructed). Handrails slope no greater than 1:50 (2.0%).
- Accessible routes exceeding 1:20 (5.0%) shall be considered a "ramp". Maximum slopes of a ramp shall be 1:12 (8.3%) in the direction of travel, and a cross slope of 1:50 (2.0%). Ramps shall have maximum rise of thirty (30) inches, shall be equipped with hand rails on both sides, and andings at the top and bottom of the ramp. Landings shall not exceed 1:50 (2.0%) in any direction and have positive drainage away from the
- A landing shall be provided at the exterior of all doors and at each end of ramps. Landings shall not exceed 1:50 (2.0%) in any direction and have positive drainage away from the landing and/or building. The landing shall be no less than 60 inches long unless permitted otherwise per the ADA
- · Curb ramps- shall not exceed a 1:12 (8.3%) slope for a maximum length
- The contractor shall verify all existing elevations shown on the plan in area of existing doorways, accessible routes or other areas where re-constructit is proposed. The contractor shall immediately notify the Owner and Engini in writing if any of the proposed work intended to meet ADA requirements incapable of doling so, or if there is any ambiguity regarding which demonstrates are intended to meet ADA requirements. The contractor shall not commence the work in the affected area until receiving written resolutiform Engineer.




N.T.S.


RESERVED PARKING SYMBOL




RESERVED PARKING SIGNAGE



ACCESSIBLE PARKING SIGN POST






PERPENDICULAR SIDEWALK RAMP

SIDEWALK RAMP

N.T.S.

DETAILS TAKEN FROM CONNECTICUT
DOT STANDARD GUIDE SHEETS


SIDEWALK RAMPS

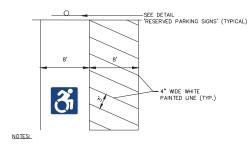

ACCESSIBLE PARKING SPACES AND ADA PASSENGER LOADING AREAS SHALL BE GRADED WITH A MAXIMUM SLOPE OF 1:50 (2%) IN ALL DIRECTIONS.

VAN ACCESSIBLE PARKING LAYOUT

N.T.S.

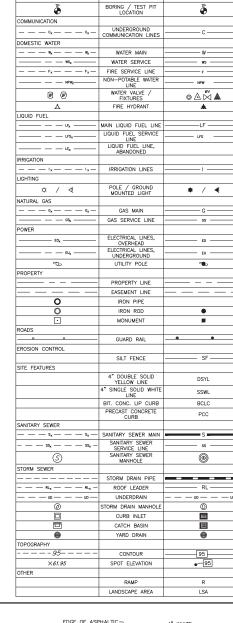

LEGEND

DESCRIPTION

EXISTING

PROPOSED

288

Reproduced Programmer of Professional Profes


5/13, 95 (1) BPW

4

3

کے ⊢ا | Y | E

E (

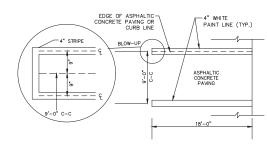

HAIRPIN STRIPING LAYOUT N.T.S.


MUNSON ROAD LLC S EXECUTIVE DRIVE, SUITE 100


BUCKLAND EAST, LLC S EXECUTIVE DRIVE, SUITE 100 MINGTON, CT 06032


APPLICANT: BUCKLAND EAST, LLC 6 EXECUTIVE DRIVE, SUITE 100 FARMINGTON, CT 06032 860-674-5624

242 220, 2020 2020 2020 8 NOTES, LEGENI DETAILS C-D1


SHEET 14 OF 16

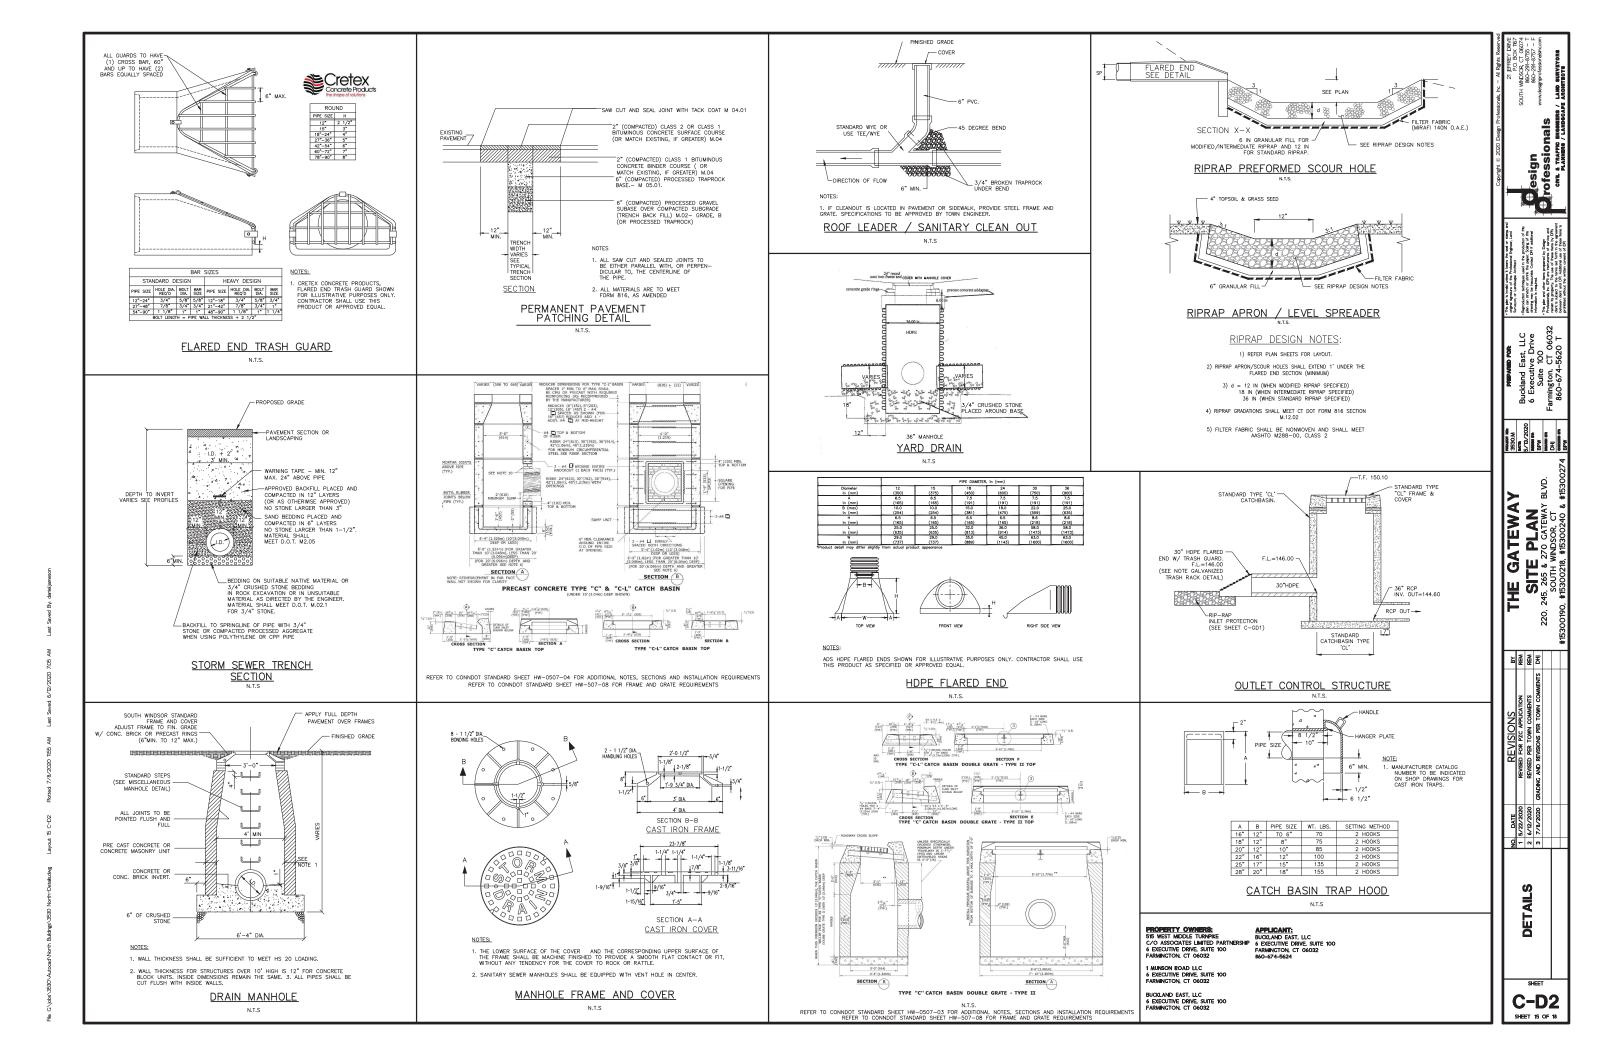

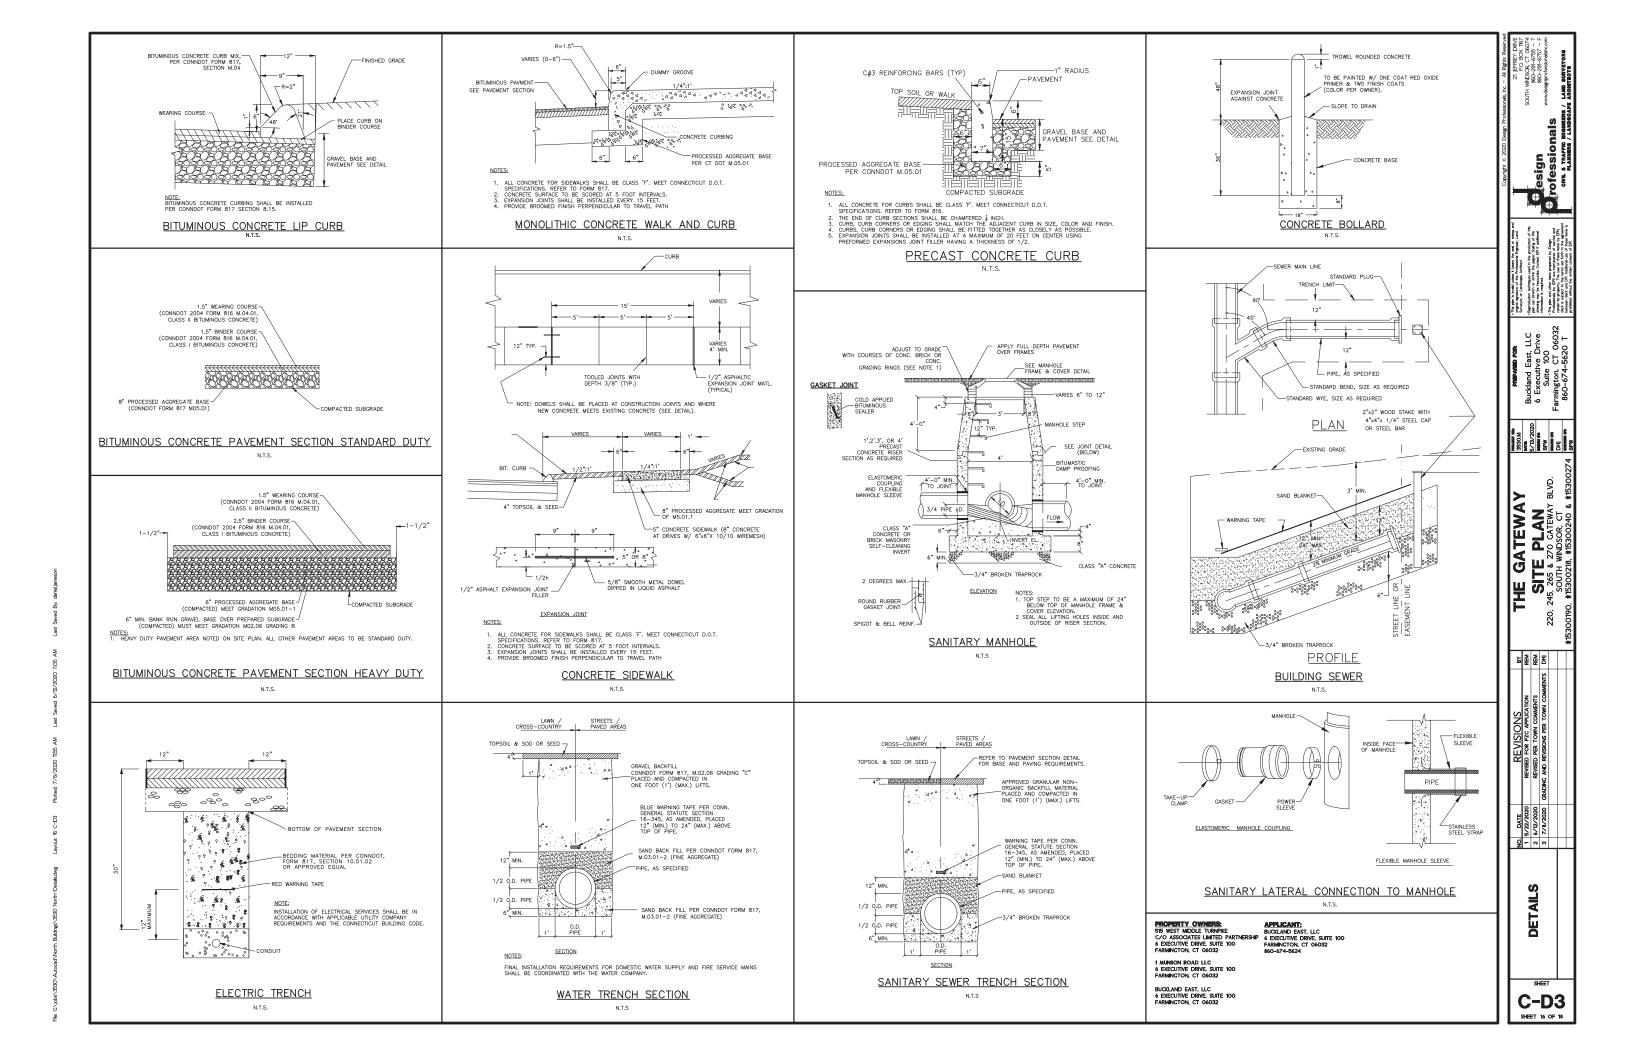

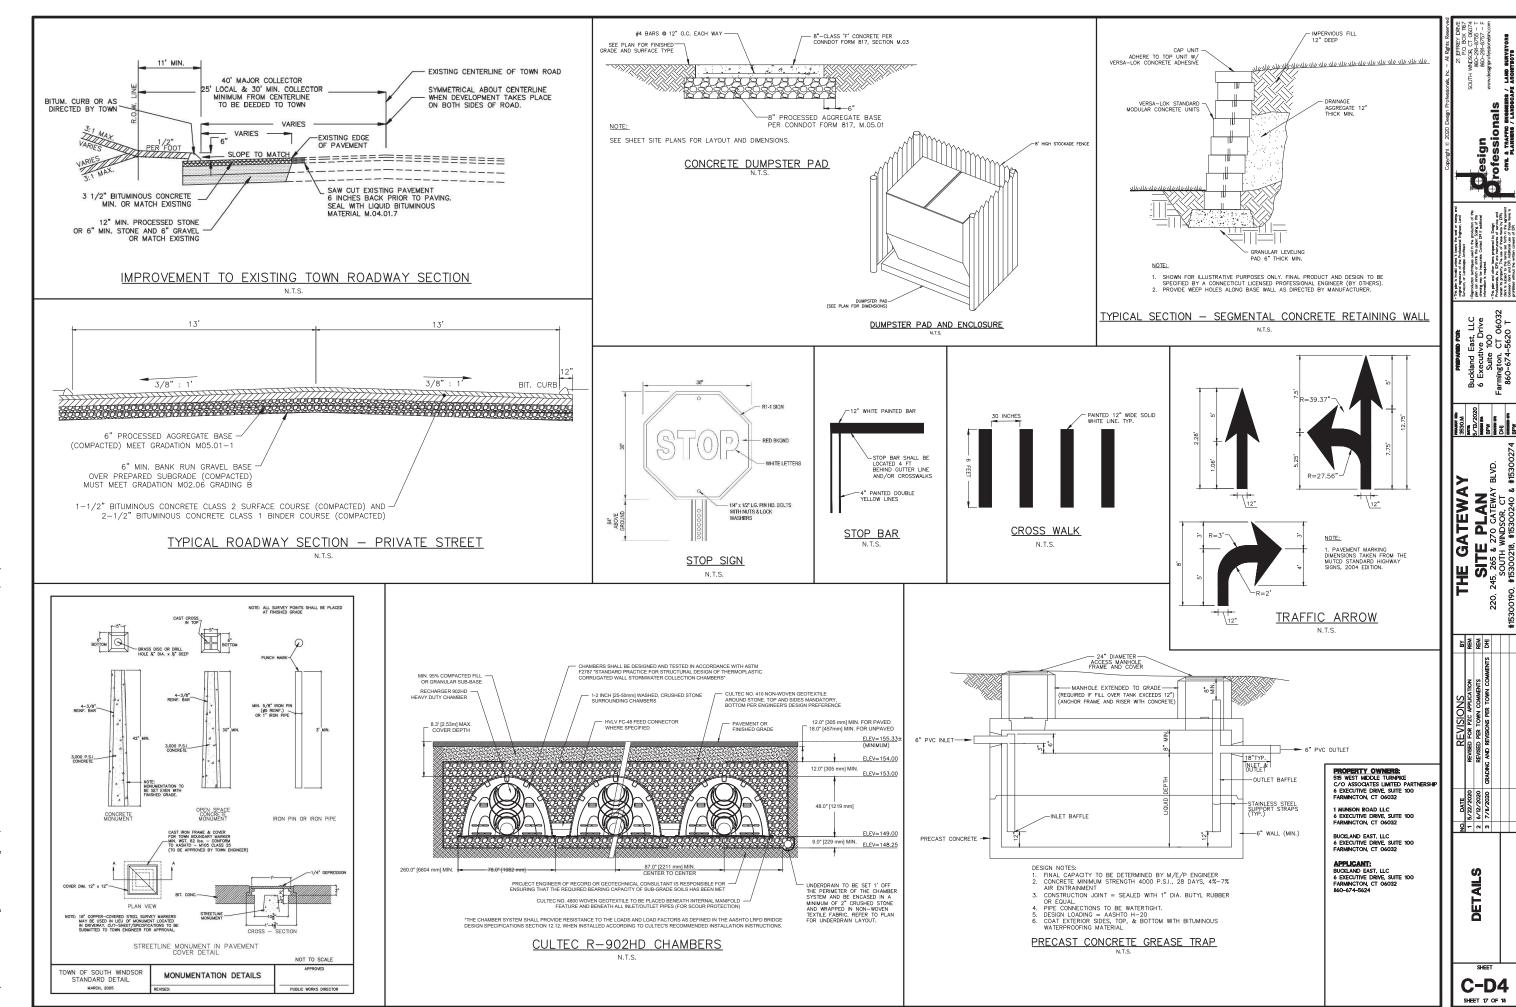

220,

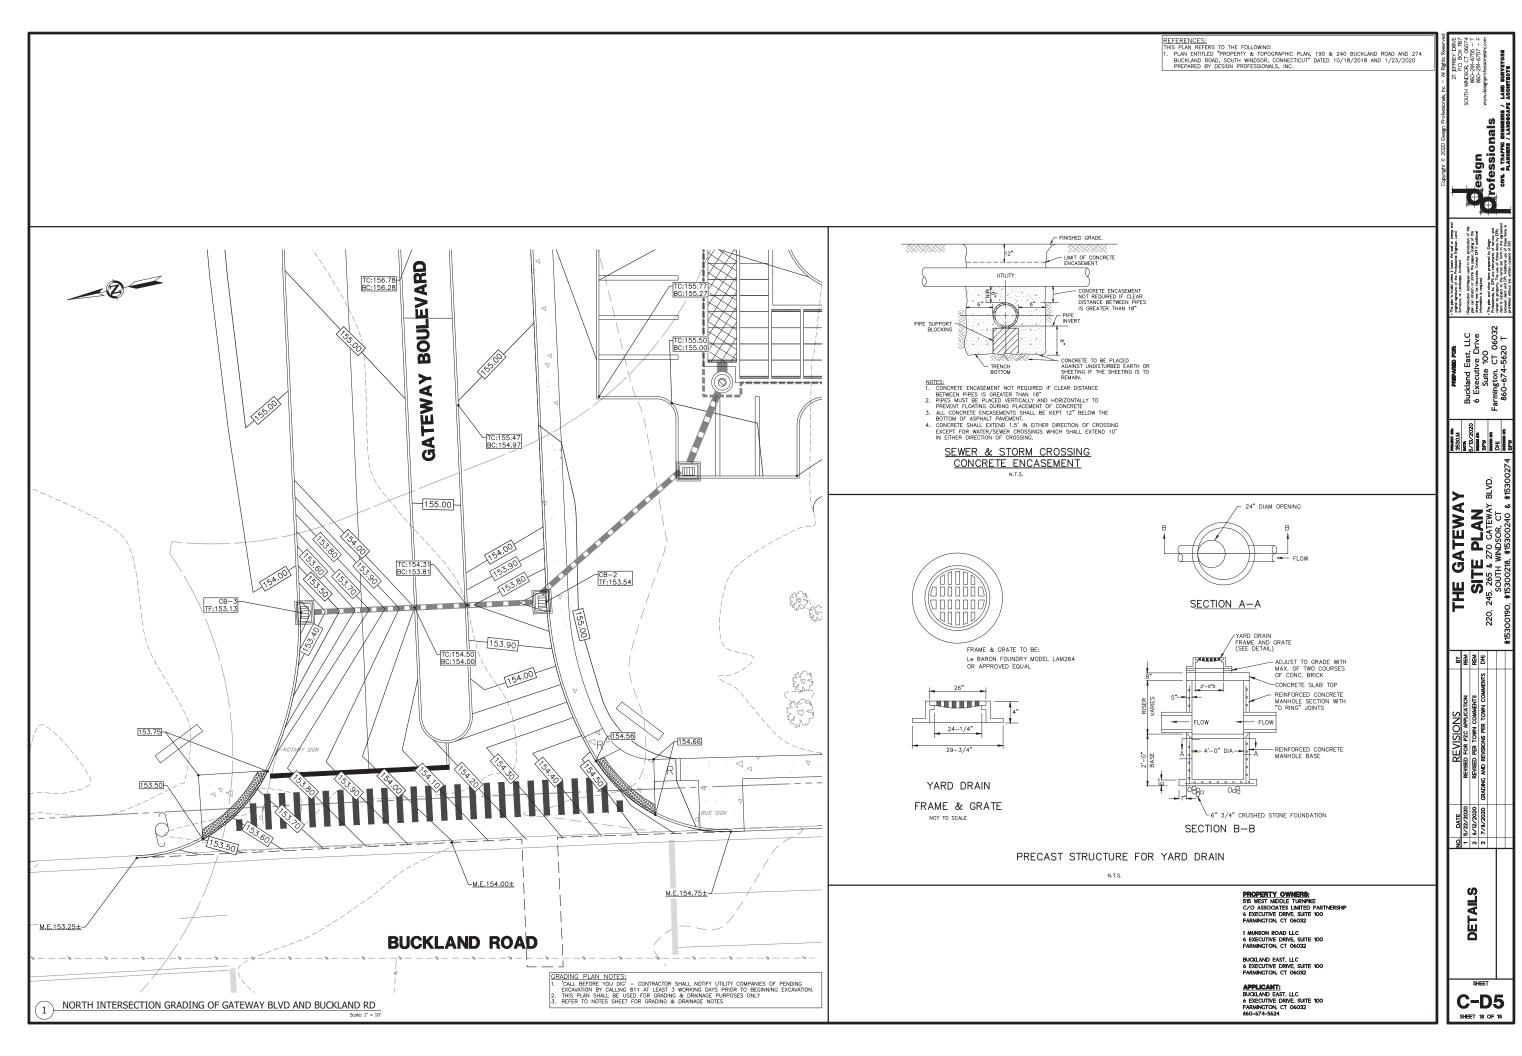

odes/5530/Autocad/North Buldinges/5530 North-Sile Planding Layout is C-D5 Platted 7/8/2020 1154 AM Last Saved B); darmally

OIES.
FROPERTY IS IN THE GD ZONE.
FROPERTY IS IN THE GD ZONE.
FROPERTY IS IN THE GD ZONE.
THE PARCEL AT 240 BUCKLAND ROAD CONTAINS 426,538
SOUARE FEET OR 9.792 ACRES. THE PARCEL AT 190
BUCKLAND ROAD CONTAINS 565,281 SOUARE FEET OR 12,992
ACRES. THE PARCEL AT 218 BUCKLAND ROAD CONTAINS
FOR THE PARCEL AT 218 BUCKLAND ROAD CONTAINS
FOR THE PARCEL AT 218 BUCKLAND ROAD CONTAINS
BASED ON NAVDBB.
BASED ON MAYDBB.
BASED ON MAYDBB.
BASED ON THE SHAPPEN FLOOD INSUPANCE
RATE MAP TOWN OF SOUTH WINDSOR, CONNECTICUT HARFFORD
COUNTY PANCE 333 OF 675 COMMUNITY NUMBER AT ELOOD
FOR TOWN OF SOUTH WINDSOR, CONNECTICUT HARFFORD
COUNTY PANCE 333 OF 675 COMMUNITY NUMBER 28, 2008 FEDERAL
BOUNDSTONES FUTCHING AND FACILITY LOCATIONS
DEPICTED AND NOTED HEREON HAVE BEEN COMPLED, IN PART,
FROM RECORD ONLY THE PROPORTION OF THE RESPECTIVE UTILITY
COMPANIES OR GOVERNMENTIAL ACENCY FEDERAL MISTARD
UNDERGROOM OF THE STANDARD FOR THE RESPECTIVE UTILITY
COMPANIES OR GOVERNMENTIAL ACENCY FEDERAL MISTARD
AND THE APPROPRIATE AUTHORS HAY EXIST ON THE
STEE, THE EXISTENCE OF WHICH ARE UNKNOWN TO DESIGN OF
AUDITIONALLY, OTHER SUCH FEATURES MAY EXIST ON THE
STEE, THE EXISTENCE OF WHICH ARE UNKNOWN TO DESIGN OF
ALL SUCH FEATURES WHICH THE AUTHOR OF WHICH THE WINNOWN TO DESIGN OF
ALL SUCH FEATURES PROOF TO CONSTRUCTION.
BY PRICE TESTING OF WHICH ARE UNKNOWN TO DESIGN OF
ALL SUCH FEATURES WHICH THE AUTHOR THES PROOF TO CONSTRUCTION.
BY PRICE STANT OF CONSTRUCTION. 1-800-922-4455
OR WWW.CSYL.COM.

MAP REFERENCES:

- MAP REFERENCES:

 1. PROPERTY & TOPOGRAPHIC SURVEY, 190 & 240 BUCKLAND ROAD, SOUTH WINDSOR, CONNECTICUT DATED 10/15/2018 PREPARED FOR BY DESIGN PROFESSIONALS, INC.

 2. ALD SIE PLAN 200 GATERAY BOULVARD & 240 BUCKLAND ROAD FOR SURVEY ROAD F



- THIS SURVEY AND MAP HAS BEEN PREPARED PURSUANT TO THE REGULATIONS OF CONNECTICUT STATE AGENCIES SECTIONS 20-3006-1 THEU 20-3006-20 AND THE YMMMUM STANDARDS OF ACCUPACY, CONTENT AND CERTIFICATION FOR SURVEYS AND MAPS* AS ADOPTED BY THE CONNECTICUT ASSOCIATION OF LAND SURVEYORS, INC. ON SEPTEMBER 26, 1996 AND REVISED ON OCTOBER 26, 2018.
 - TYPE OF SURVEY IS AN EASEMENT SURVEY AND IS INTENDED TO DEPICT THE LOCATION OF EXISTING & PROPOSED EASEMENTS RELATIVE TO PROPERTY LINES.
 - THIS IS A INDEPENDENT RESURVEY BASED ON MAPS REFERENCED HEREON.
 - HORIZONTAL ACCURACY MEETS CLASS A-2 STANDARDS.

TO MY KNOWLEDGE AND BELIEF, THIS MAP IS SUBSTANTIALLY CORRECT AS NOTED HEREON.

EM-1

BARRY D. CLARKE, L.S.

16766 LIC. NO.

₩ 80 9% B4

esign Professionals on a narro memms

in the property of the propert

Buckland E 6 Executiv Suite armington,

3530.M DATE 9/19/19 DESIGN OT: ---DAMME ET: RMB CHECKED OF: LRC

O BUCKLAND ROAD LLC, ROBN C.

ND & MCHELLE C. HALVORSEN, &
MARION & ROY ROUNSEVILLE

TRUSTEES

190, 206, 218, & 240 BUCKLAND ROAD

SOUTH WINDSON CONNECTION


206. 1711.

06032 J East, LLC tive Drive, e 100 n, CT 06032

REVISE REVISE DATE 11/25/2019 1-15-2020 5/14/2020

PLAN

EASEMENT

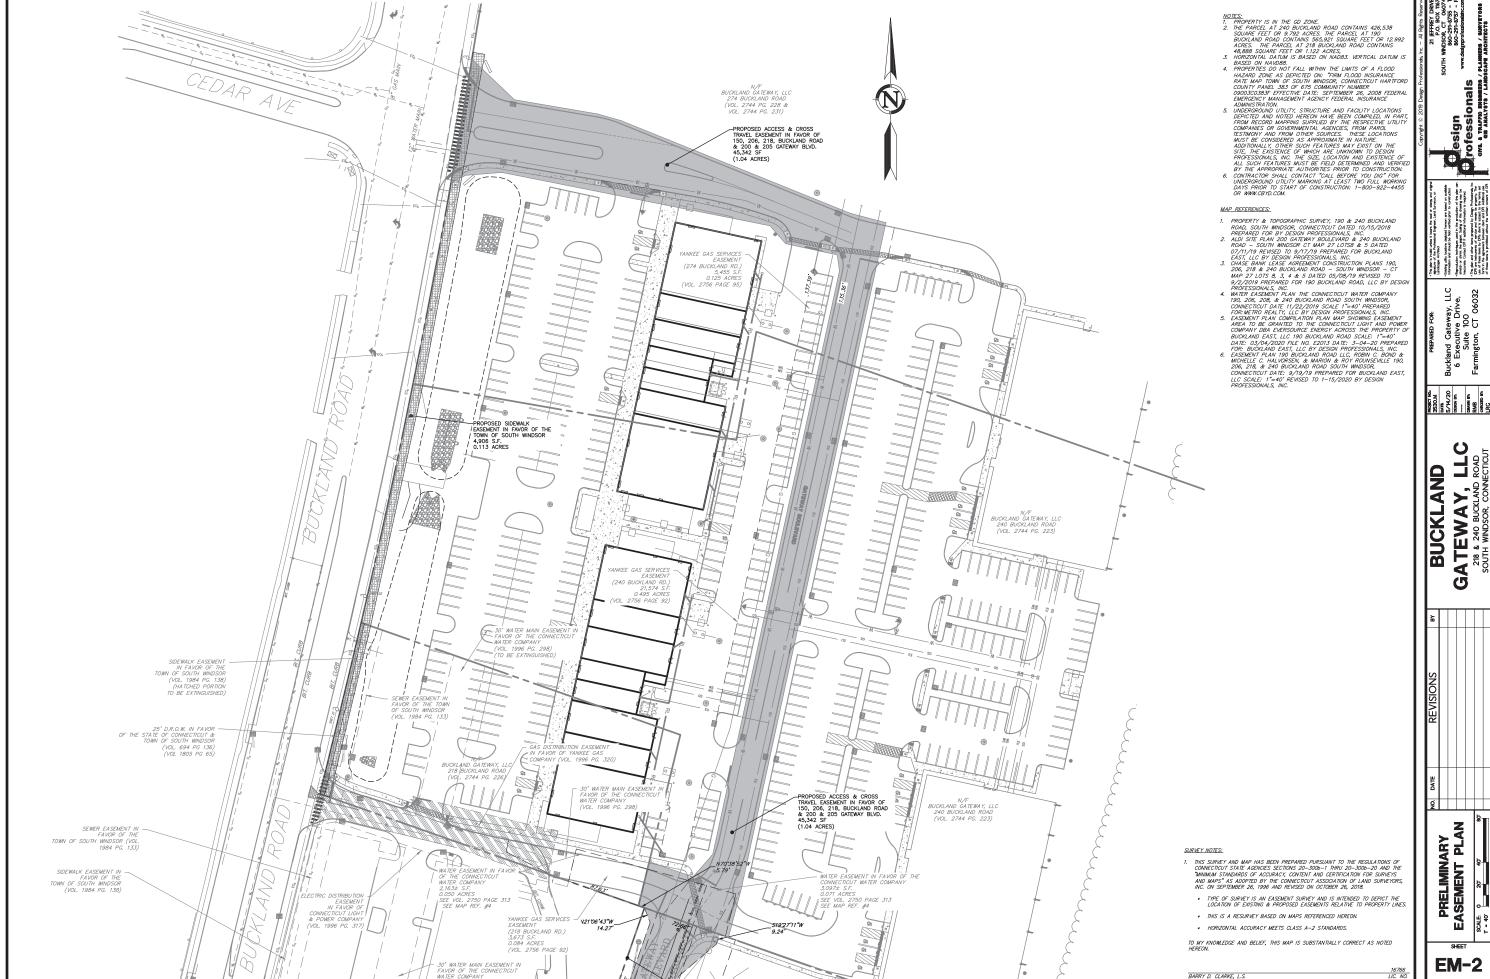

Cesign Trofessionals


Buckland Gateway, LLC 6 Executive Drive, Suite 100 Farmington, CT 06032


O Road

GATEWAY, I

PRELIMINARY EASEMENT PLAN

EM-2

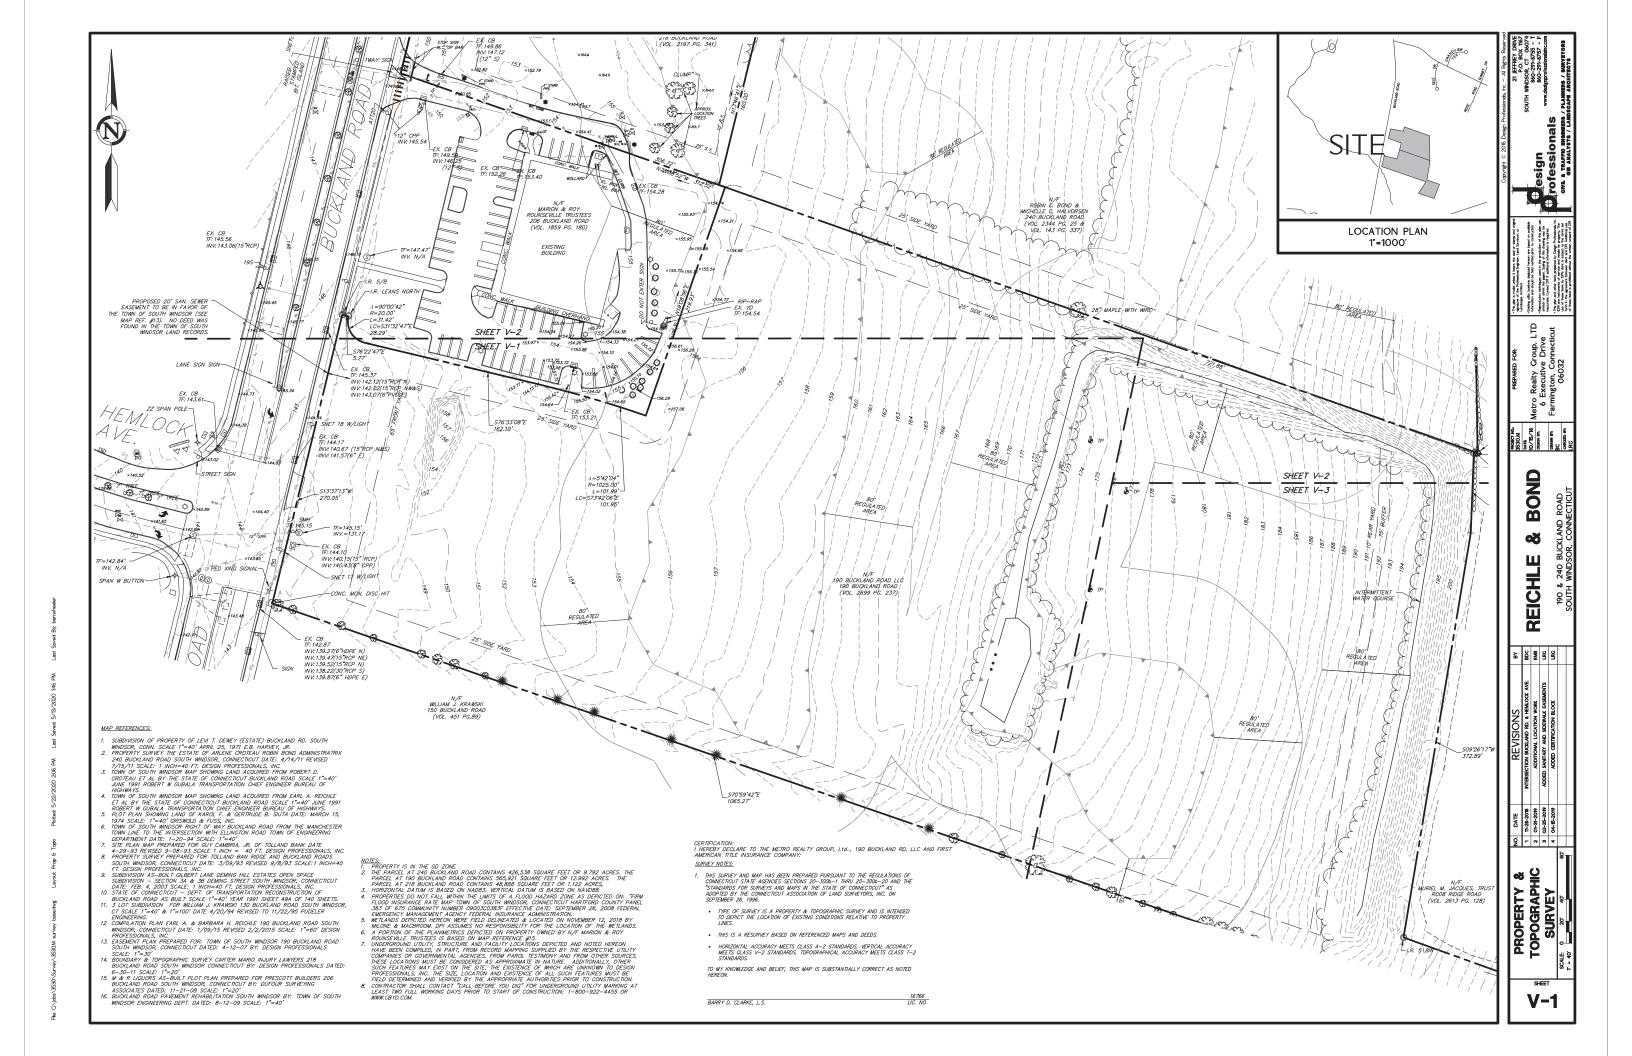

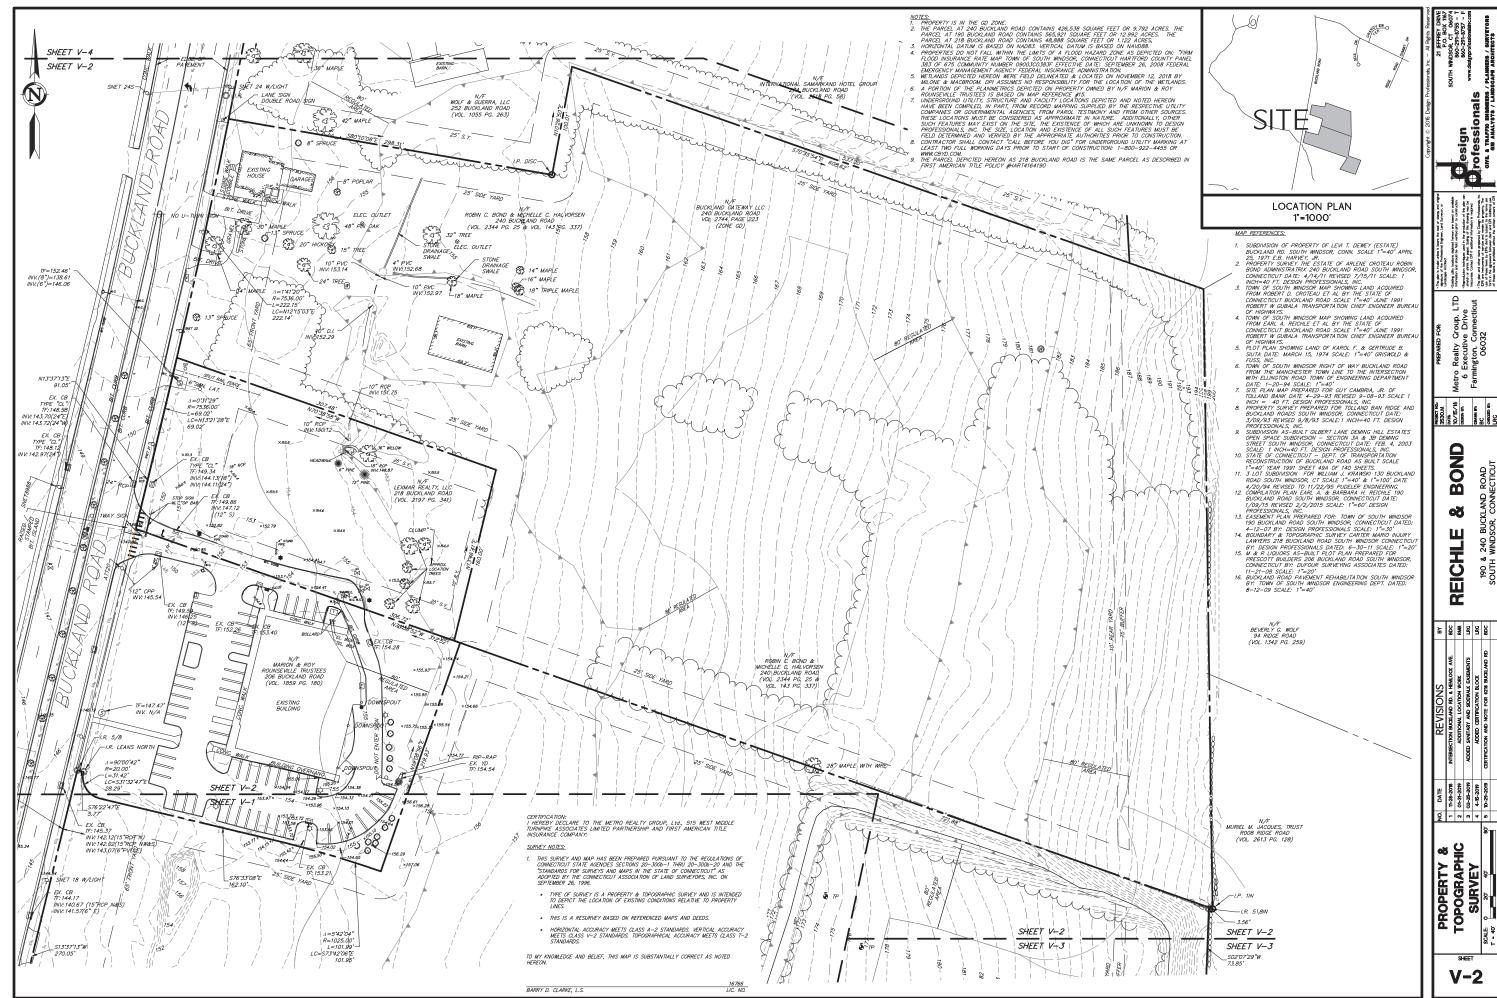

sign TÖ


Speaking of the state of the st

o Realty Group, | Executive Drive nington, Connecti 06032

190 & SOUTH V

REVISIONS
COTON BUCQUAND RD. & HE
ADDITIONAL LOCATION WE
ADDED CERTIFICATION BLC
TION AND NOTE FOR \$238

V-2

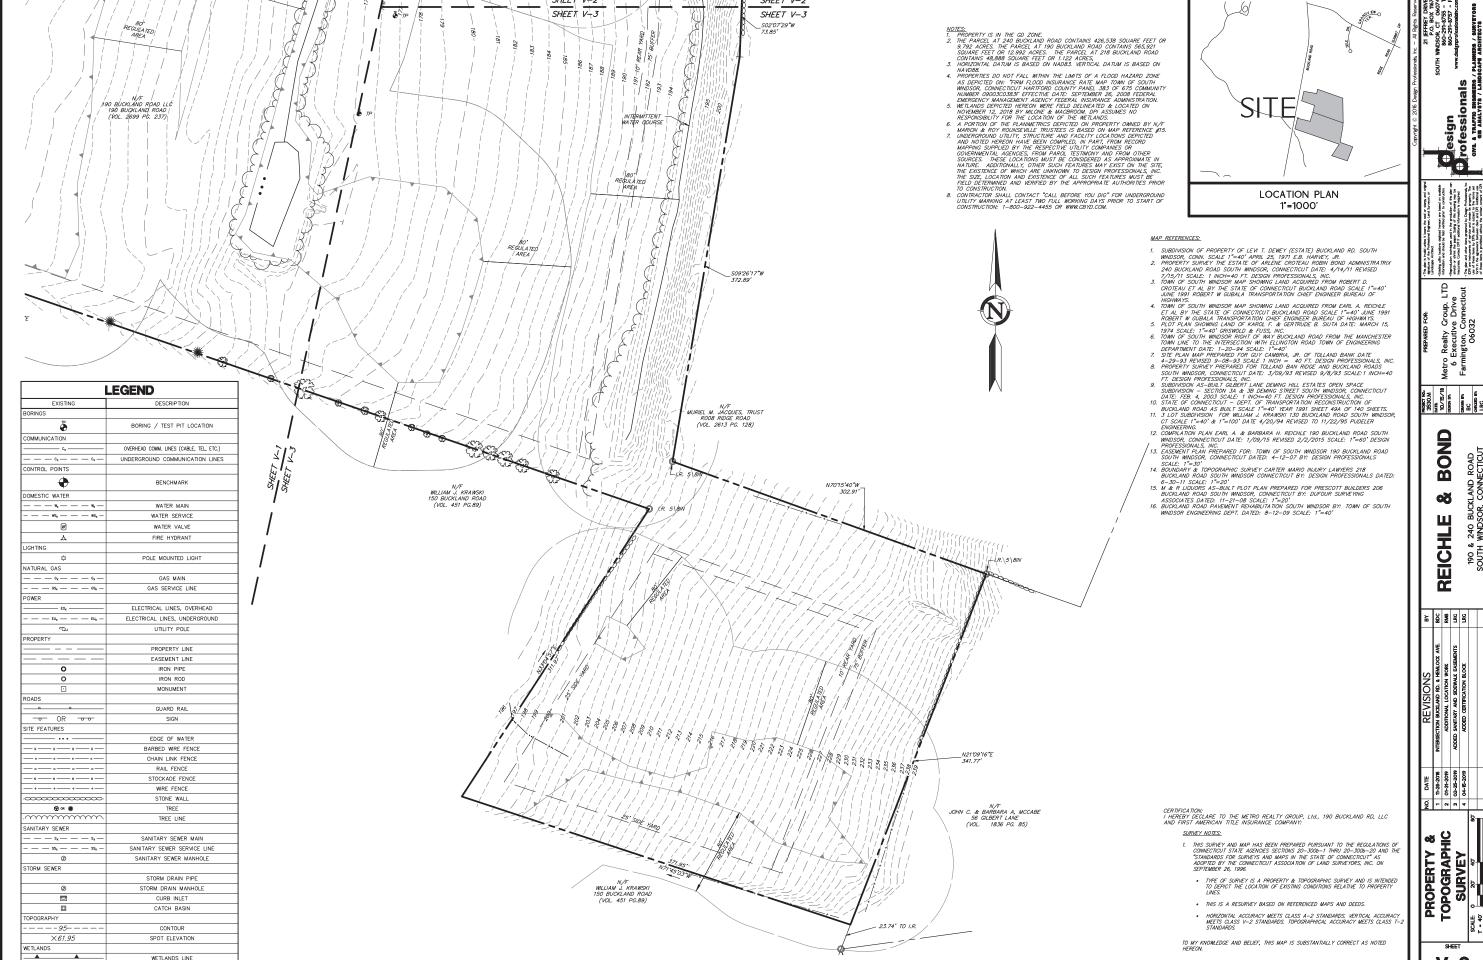

16766 LIC. NO. BARRY D. CLARKE, L.S.

sign

E oup. Drive

ONO


m

60


REICHL


85


Realty Gro Executive Dington, Conr 06032

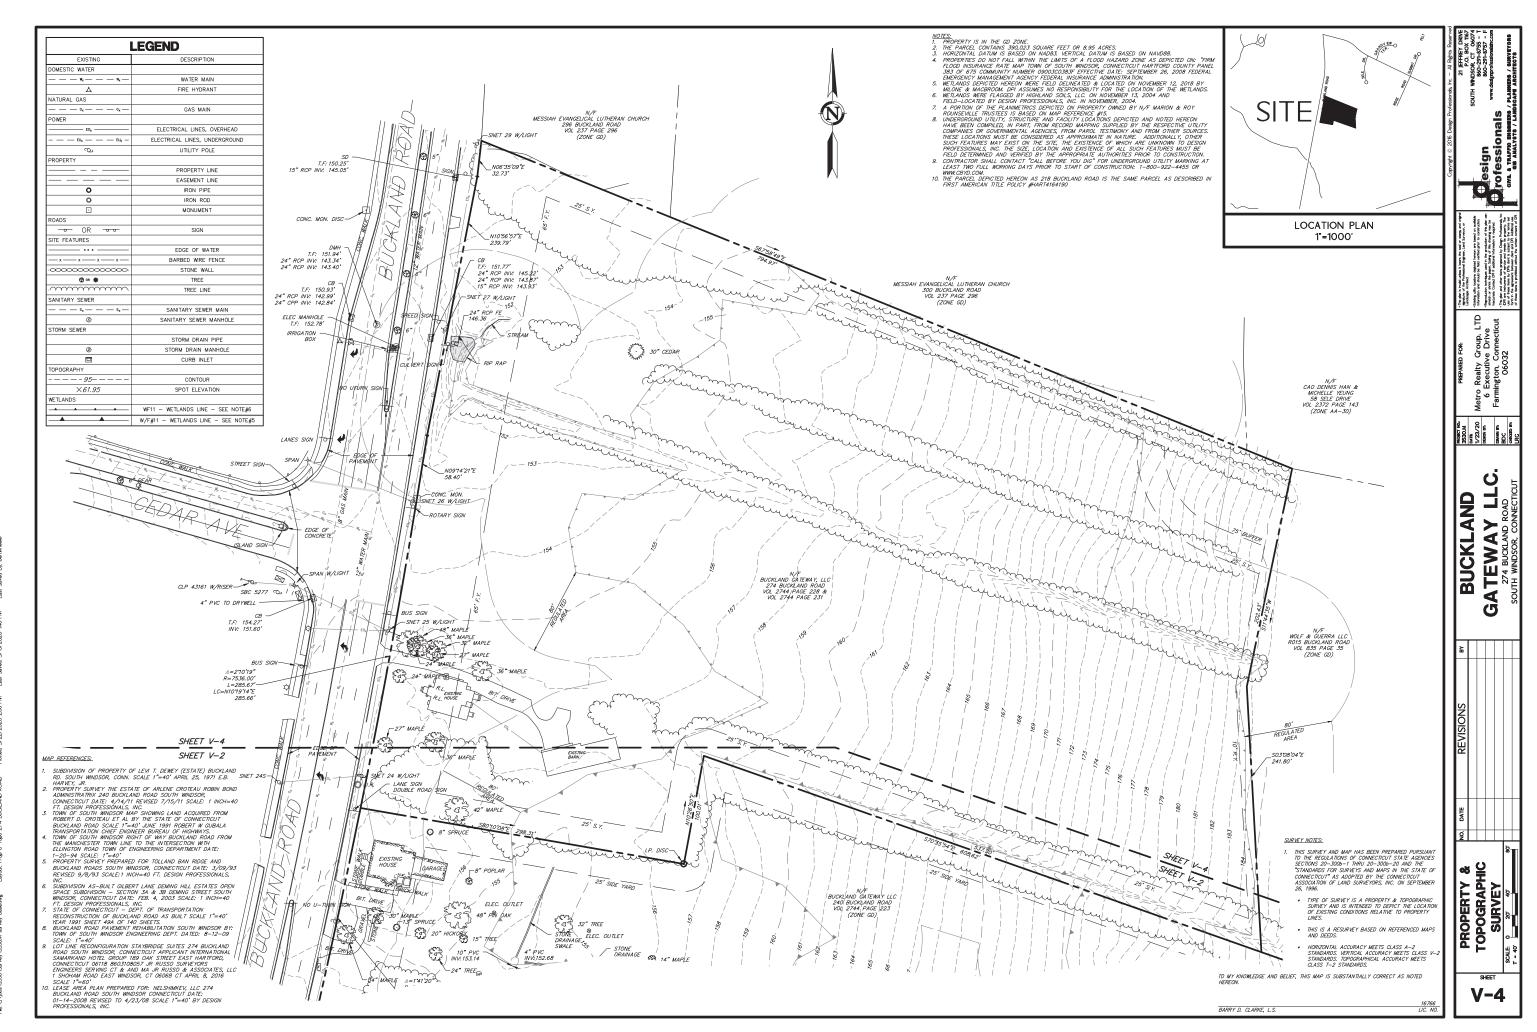


M. Comer, bearedure | march Deve G Tone 72/1 BIPST AND DOAD | Deduct E/72/2007 12/8 DM | not Sunced E/72/2007 14/8 DM | not Sunced Bu bows

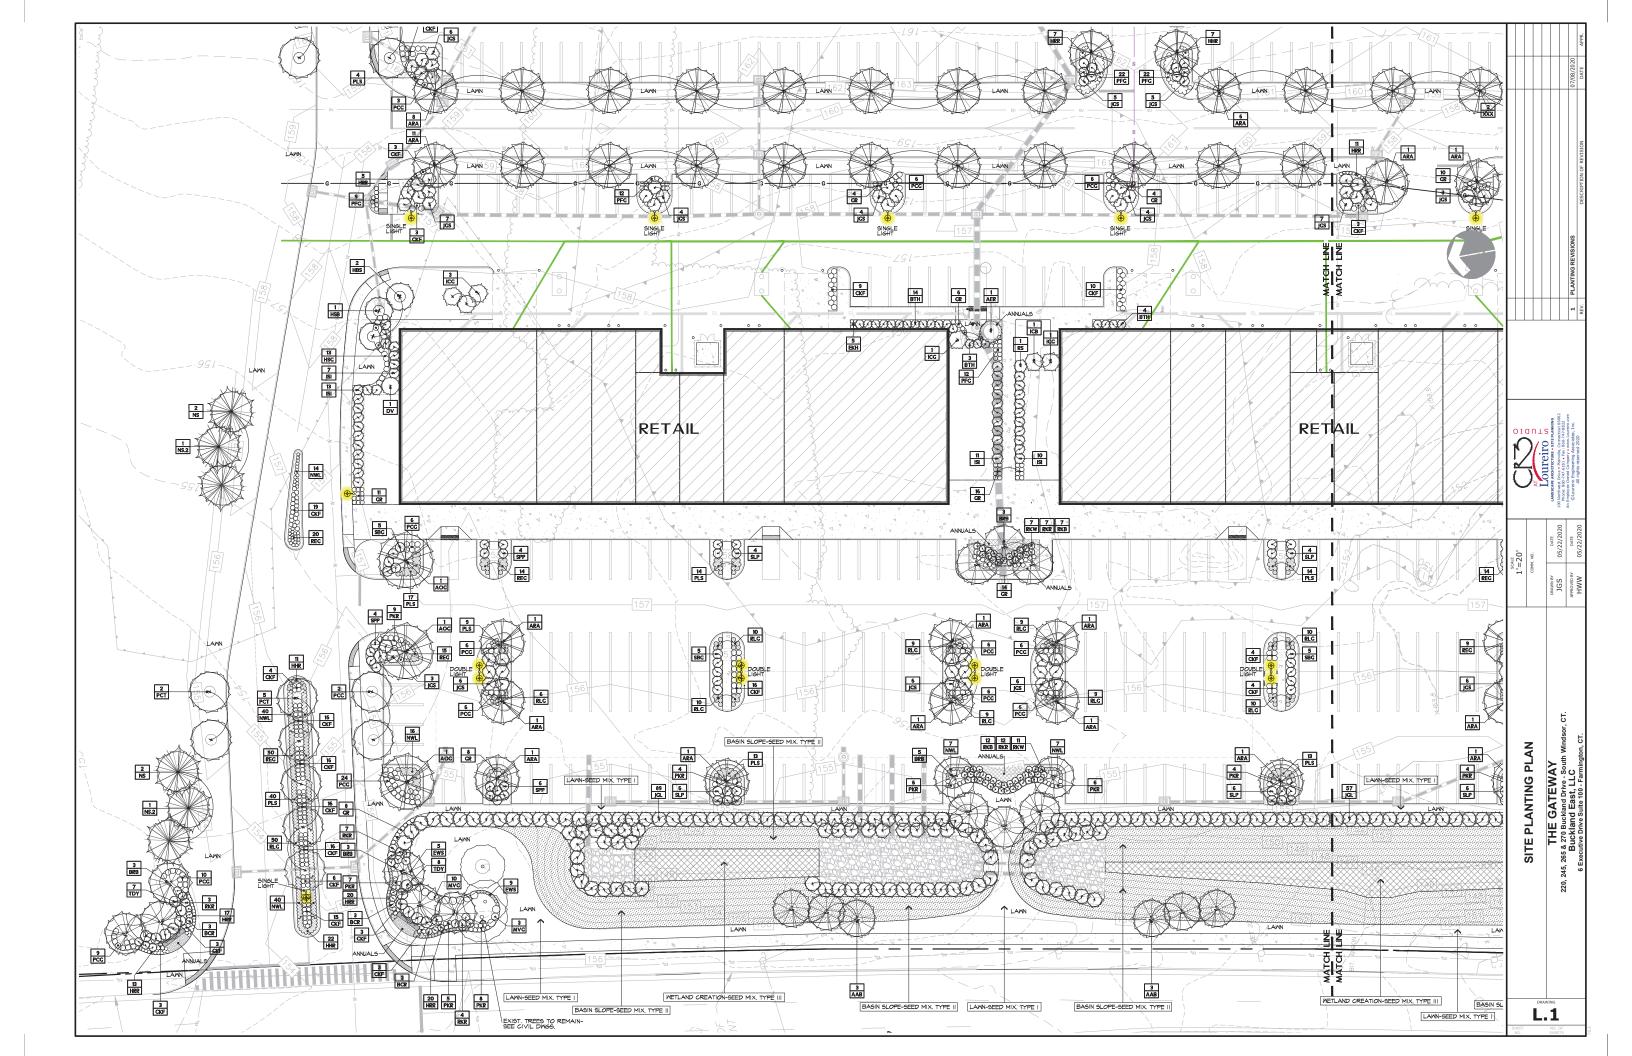

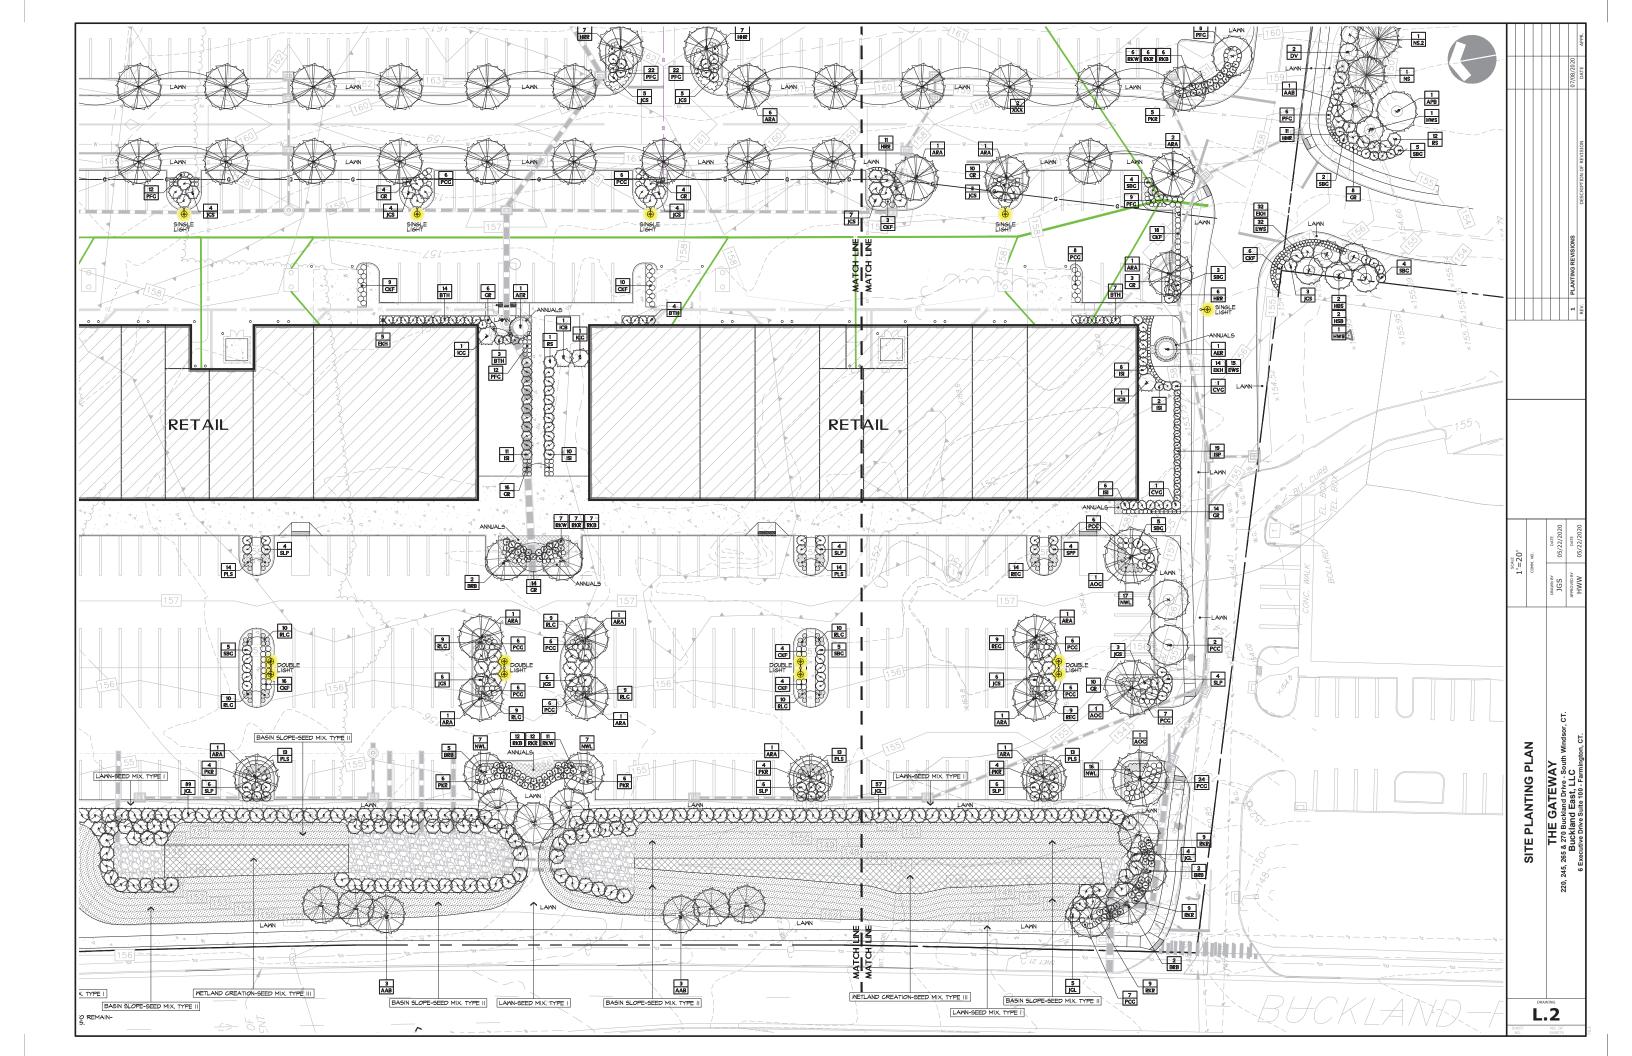

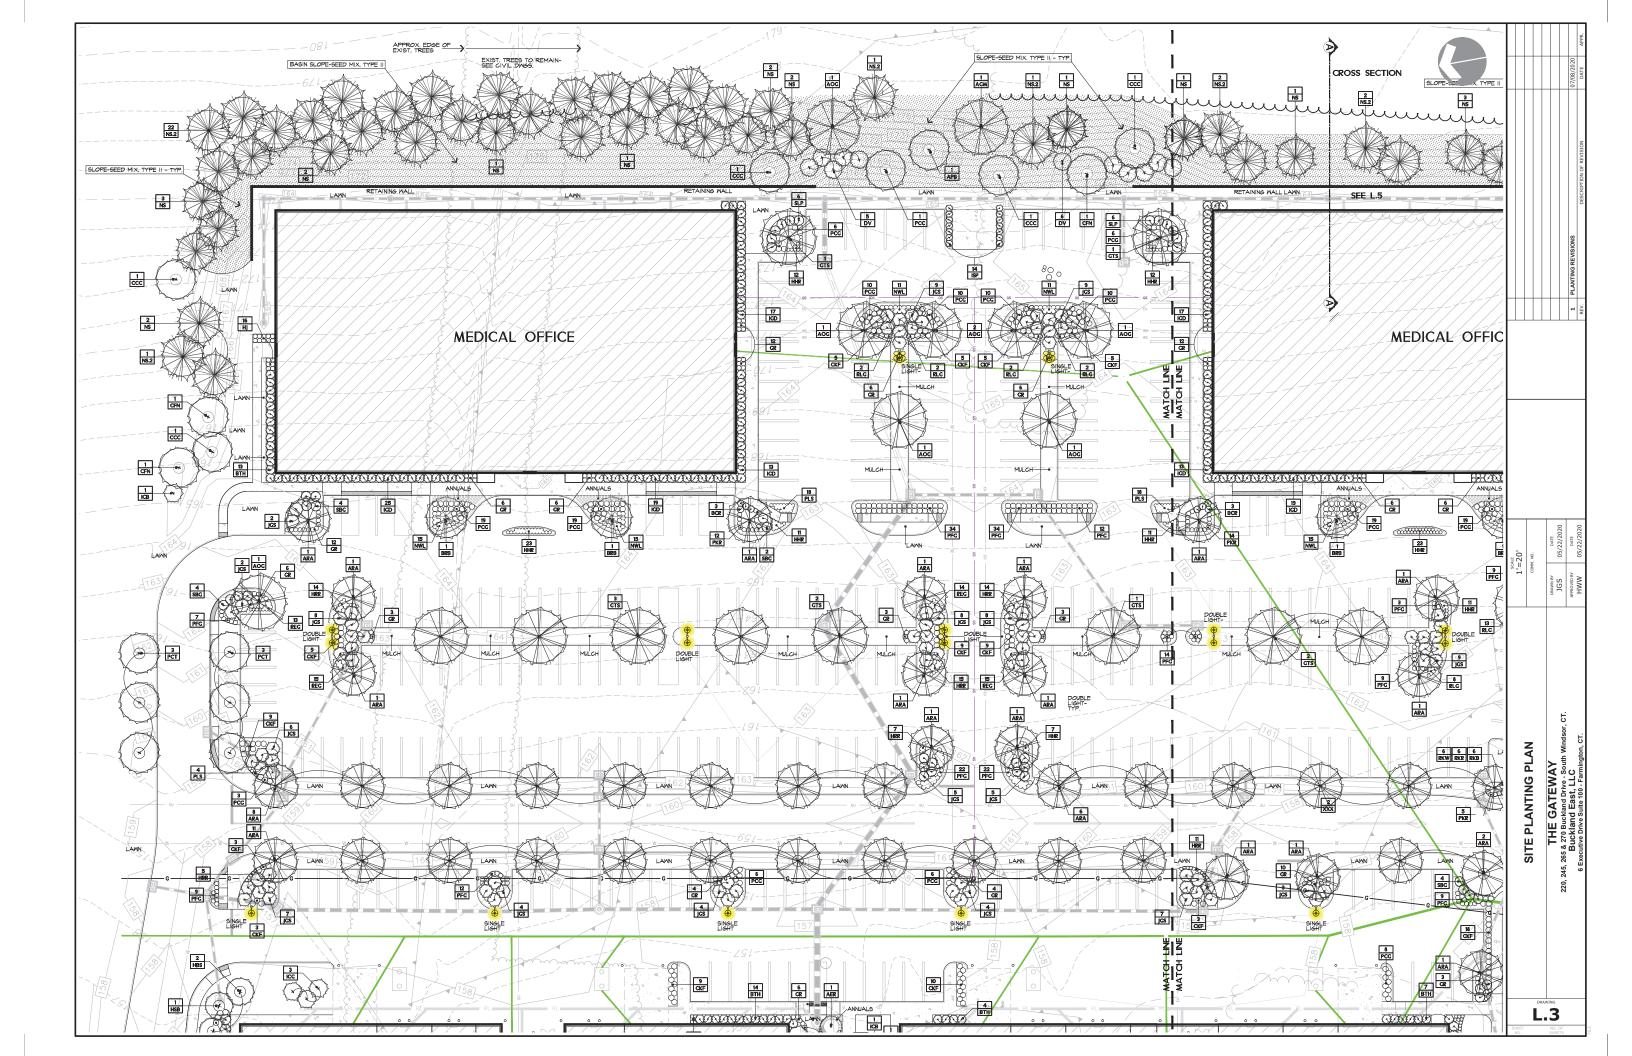

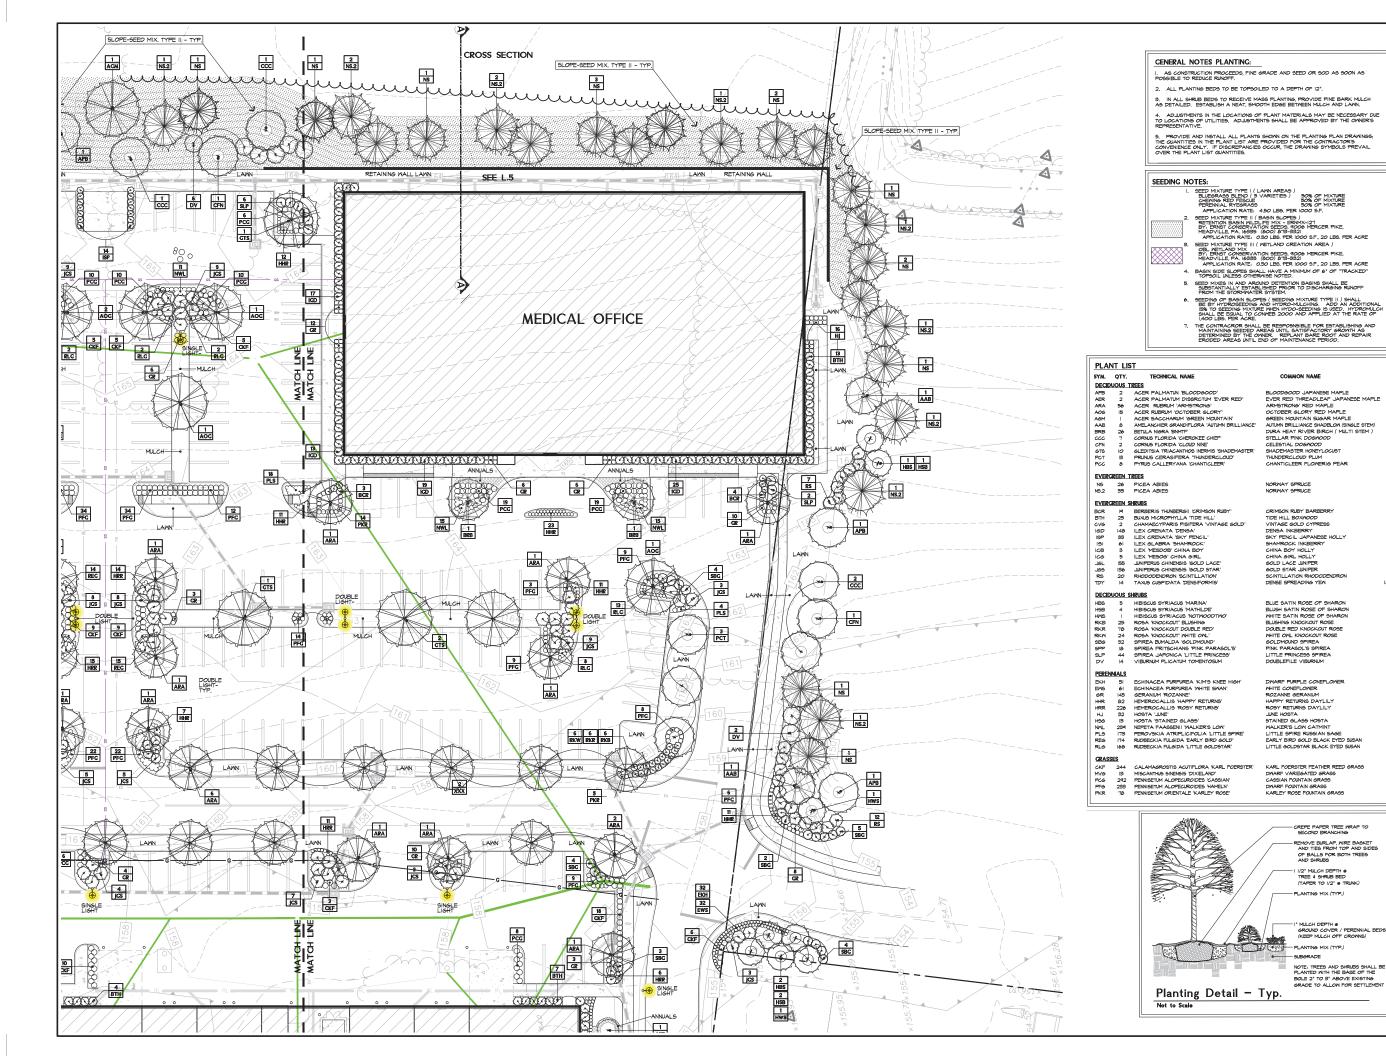



6'-8' HT.
IO 6AL.
2½"-3" CAL.
2½"-3" CAL.
2½"-3" CAL.
12'-14' HT.
2"-2½" CAL.
2½"-3" CAL.
2½"-3" CAL.
2½-2½" CAL.
2"-2½" CAL.

6'-T' HT. B&B 8'-IO' HT. B&B


2 6AL. CONT.
2 6AL. CONT.
3 44 HT. B4B
3 6AL. CONT.
3 6AL. CONT.
3 44 HT. B4B
3 4 HT. B4B
3 6AL. CONT.
5 6AL. CONT.
15 6AL. CONT.
16"-24" SPR. B4B

4'-5' HT. B&B 4'-5' HT. B&B 3 GAL. CONT. 8 GAL. CONT. 8 GAL. CONT.

> 5 PNT. CONT. 5 PNT. CONT.

PLANTING PLAN THE GATEWAY
5. 265 & 270 Buckland Drive - South
Buckland East, LLC
6 Executive Drive Suite 100 - Farmingt SITE

L.4

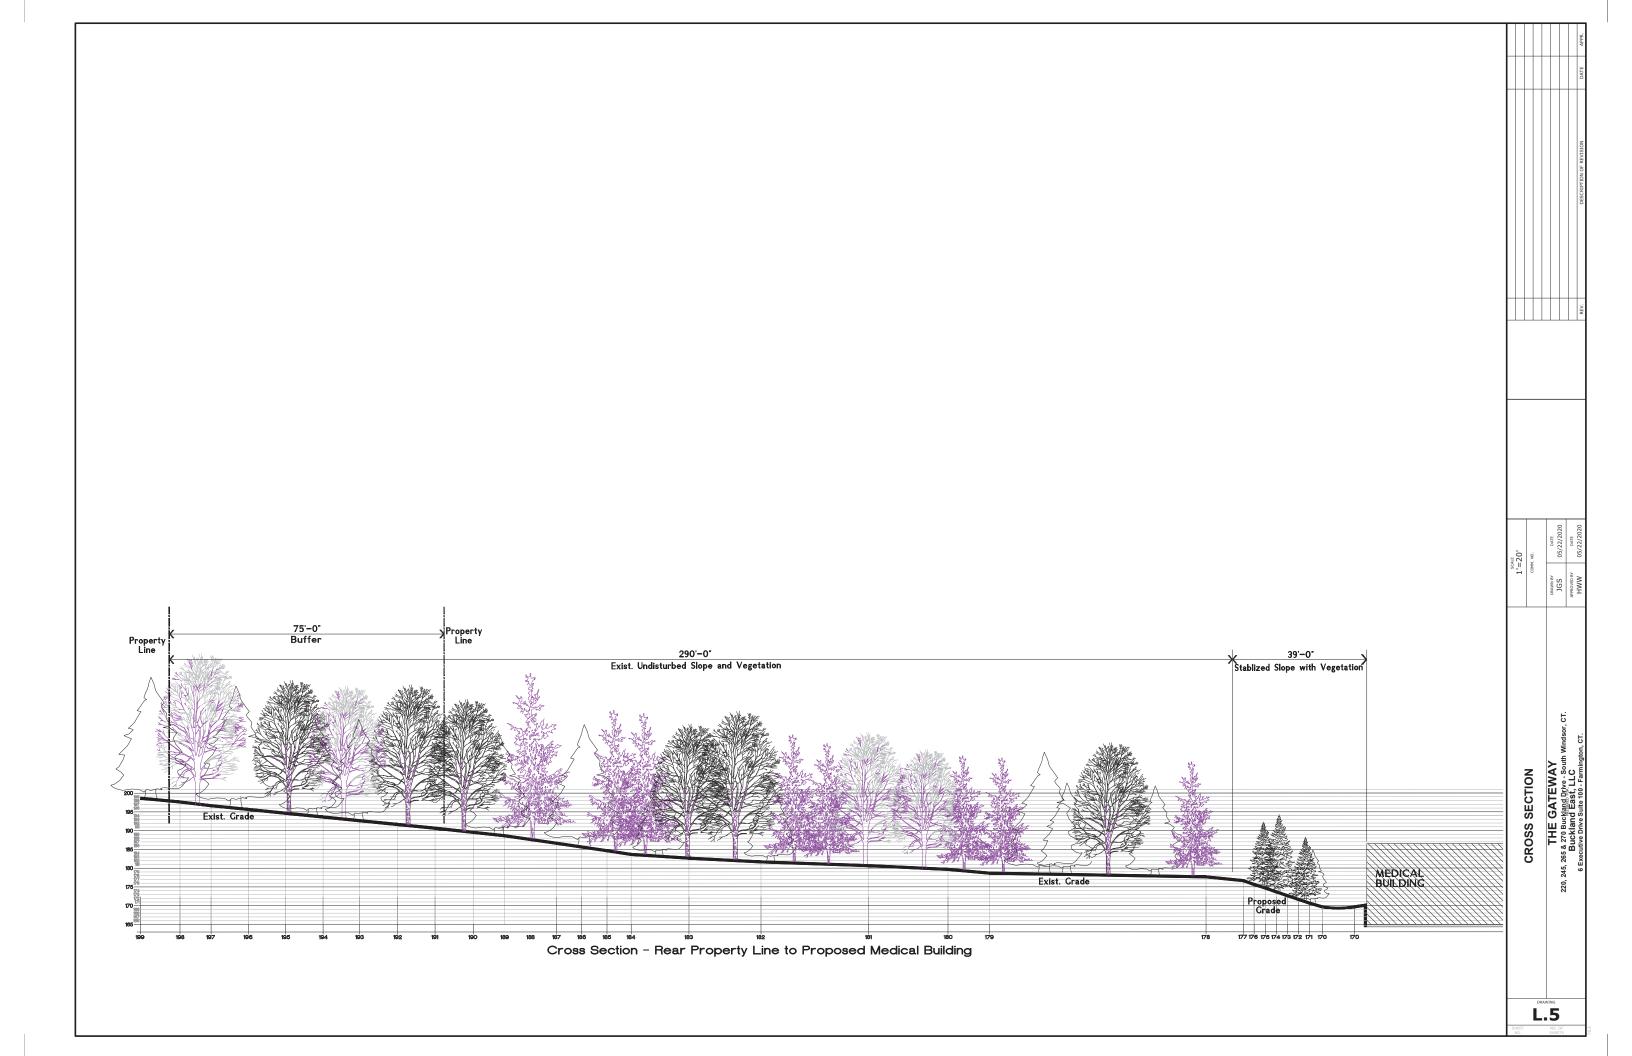

Luminaire S		Ix t t		Tx x	Lv	XX7	TTE	DUG B		B 1.7	
Symbol	Qty	Label	Arrangement	Lum. Lumen		watts	LLF	BUG Rat		Description	CD DA LOV TOLLO DI COL TICOL DE DEDVE COCATACIDA LO DEDVE ASSET DOL
	2	SL2	SINGLE	24001	185		0.900	B3-U0-G			ED P2 40K T2M MVOLT SPA DDBXD - SSS 25 4G DM19AS DDBXD 25FT POL
_ =	8	SL5	SINGLE	29139	217		0.900	B5-U0-G			ED P2 40K T5W MVOLT SPA DDBXD - SSS 25 4G DM19AS DDBXD 25FT POL
	→ 10	SL5-2	BACK-BACK	24805	185		0.900	B5-U0-G	4	Lithonia DSX2 LE	ED P2 40K T5W MVOLT SPA DDBXD - SSS 25 4G DM28AS DDBXD 25FT POL
											Greg Loda / Mike O'Connor
Calculation	Summary				Lvv	-	1.7	1.0	1. 20	Dr. 00	Lighting Affiliates 1208 Cromwell Ave
Label				CalcType	Units	Avg	Max	Min	Avg/Mi:		
SITE				Illuminance	Fc	1.55	5.6	0.0	N.A.	N.A.	Rocky Hill, CT 06067
	AIL PARKING			Illuminance	Fc	2.35	5.5	1.0	2.35	5.50	
MOB PARI				Illuminance	Fc	2.23	5.6	0.4	5.58	14.00	website: www.lightingaffiliates.com
RETAIL RE	EAR PARKING	ì		Illuminance	Fc	1.68	3.3	0.6	2.80	5.50	Voice Number : (860) 721-1171 x 219 Email Address : gloda@lightingaffiliates.com
											/
											to to to to to to to to
A			Otaleg Number		_	SSS Sauar	e Straight Steel	Poles			to to to to to to to to to
L/7	THONIA LI	GHTING	Number			DDD Squar	e strangint steet	1 0100			to to to to to to to to to
	SPECIFICATIONS		Notes								
specifications, Square S	especifications arefor USA standards or Straight Steel is a general purpose light po	ole for up to 39-foot mounting heigh			-				CHRICAL INFORMATION —	EPA (ft2) with 1.3 gust EPA (ft ²) with 1.3 gust	to t
This make maniples a solute	est yet cost effective agtion for mounting as	rea lights and floodlights.	120		1	Catalog Numbe	morninal Pole St	n. x Top Wall thick Go	100 MPH Max.		Folk Bolt-size circle (inc. vin. xin.) Appreximate shipwords: 0.0 to 0.0


LITHONIA LIGHTING	Rombin
FEATURES & SPECIFICATIONS	Rotes.
NTENDEDUSE — These specifications are for USA standards only. Checkwith factory for Canadian peoficiations. Square Straight Sheel is a general purpose light pole for up to 3% foot mounting heights. He pole powides a orbest vice out effective aution for mounting a real holds and floodlights.	Type
ONSTRUCTION — Pale Shaffs the pole shaft is of uniform dimension and wall fliddness and is made of a weldalite space, has readed, commercial quality seed trabing with a minimum yield at 35 XSI 17-paper, 1170 ¹⁶ ; a 200 XSI (7-pape, 1707) ¹⁸ ; but in severe levels it gill-legally implicable high- request yell-citic residence wells fulfillingly square in consensation with flat sides, small connected and orderect transitional parties. Available with which are 45° 2 and 2.	Anchor Base Pole
Pole Top: A flush non-metalic black top cap is provided for all poles that will receive drilling patterns for side-mount luminaire arm assembles or when ordered with PT sotion.	SSS
and finder. A reinforced handhole with grounding provides is provided at 16° from the base on side. Positioning the handhole lower may not be possible and requires engineering review, consult tech ppart. Outdoor for further information. Levey handhole includes a curver and cover attachment handware, in handhole less annihole information (2.5° v.5°).	SQUARE STRAIGHT STEE
isse Cover: A dissible ABS plastic two-piece full base cover, finished to match the pole, is provided with ach pule assembly. Additional base coveraptions are available upon request.	
scher Baser Beites Ancher base is fabricated from steel that meets ASTM A36 standards and can be leved to match existing Soundations; consult factory for modifications. Anchor beits are manufactured. ASTM FTSM Standards grade SS, USS NSI minimum yield strength and breastle strength of 75-65 RSII. by threaded particle (naminal TZ*) is that dispert galaxited per ASTMA-153.	
IARDWARE — All structural fasteners are high-strength golvanized carbon steel. All non-structural esteners are galaxaised or sinc-plated carbon steel or stainless steel.	
NIMI— Euro darable standing moder out finishes include lock livrous, MINS, ISAN, Medium Nixou. NIMI— Euro Mixou Minimi (Minimi Minimi	
MEGANTY — 1-yeor limited warranty. Complete warranty terms located at: www.aculinboords.com/Costone-Resources/Terms_and_conditions.aspx	
ATT: E-trail performance may differ an a week of and once analyzement and are deather	


sss						
	central feature	Nominal shaft base size/wall thickness'	Mounting ¹		Options	Finish**
	19-39* Ser LOPA SER L	at. 4"ht 10%"; dis 4"pt 10%"; dis 5"pt 10%"; dis 5"pt 10%"; dis 5"pt 10%"; dis 5"pt 10%"; dis 5"pt 10%"; discreption table forcespiles ordesig information 2.)	Seas Handler	BREST-Speed Self Transcrategy BERNESS Large	Staged circle and Communication and Communicatio	Stanfacturing COOD Substance DRASS White COOD Substance DRASS White COOD Substance DRASS White DRASS W


				TECHNO	CALINFORM	ATTON — E	PA (ft2) wit	h 1.3 gust					
	Nominal	Pole Shaft Size	TO BE STORY				EPA(ft')w	ith 1.3 gust			Bolt	1000000	Aggregimet
Catalog Number	Shaft Length (ft.)*	(Base in. x Top in. x ft.)	Wall thick (in)	Gauge	80 MPH	Max. weight	90 MPH	Max. weight	100 MPH	Max. weight	circle (in)	Bolt size (in. x in. x in.)	ship weight (lbs.)
SSS 10-4C	10	4.0 x 10.0	0.1156	11	30.6	765	23.8	595	18.9	473	8-9	3/4x18x3	75
SSS 12.4C	12	4.0 x 12.0	0.1196	11	24.4	610	13.8	470	14.8	320	8-9	3/4x18±3	90
SSS 14-4C	14.	48x140	0.1156	11	79.9	498	15.1	378	11.7	293	8-9	3/4x18x3	190
SSS 16-4C	16	4.0 x 16.0	0.1196	11	15.9	398	11.8	295	8.9	223	8-9	3/4x18x3	115
SSS 18-4C	18	40x18.0	0.1156	11	12.6	315	9.2	130	6.7	168	8-9	3/4x18±3	125
SSS 20-4C	20	40x20.0	0.1156	11	9.6	240	6.7	167	4.5	150	8-9	3/4x18x3	100
555 20 46	20	40×20.0	0.1793	7	14	350	11	175	8	290	8-9	3/4x30±3	198
555 20 5C	20	5.0 x 20.0	0.1196	11	W	443	12.7	36	9.4	235	10-12	1x36x4	185
SSS 20 56	20	5.0 x 20.0	0.1793	7	28.1	703	21.4	535	16.2	405	10-12	1x36x4	165
555 25 4C	25	40x25.0	0.1196	11	4.8	150	2.6	100	1	50	8-9	3/4x18x3	170
555 25 46	25	4.0 x 25.0	0.1793	7	10.8	270	7.2	188	5.4	135	8-9	3/4x30±3	345
SSS 25 5C	25	5.0 x 25.0	0.1196	11	9.8	245	63	157	3.7	150	10-12	1x36x4	225
555 25 56	25	5.0 x 25.0	0.1793	7	18.5	463	13.3	333	9.5	238	10-12	1x36x4	360
555 30 46	30	4.0 x 30.0	0.1793	7	67	168	4.4	110	2.6	65	8-9	3/4x30x3	295
SSS 30 SC	30	5.0 x 30.0	0.1156	11	4.7	150	2	50	100	-	10-12	1x36x4	265
555 30 56	30	5.0 x 30.0	0.1793	7	10.7	267	67	167	3.9	100	10-12	1x36x4	380

	POLE DATA								
	Shaft base size	Bolt circle A	Bolt projection B	Base diameter (Base plate thickness	Template description	Anchor bolt description	Anchor belt and template number	Ancher balt description
	410	8"-9"	3.25"- 3.75"	8"-825"	0.75"	ABTEMPLATE P150004	A818-0	ABSSS-4C	3/4"(18")(3"
	416	8°-9"	138"- 375"	8"-835"	0.875*	ABTEMPLATE PISO004	A830 0	ABSSS-46	3/4"x30"x3"
5"	5"	10" - 12"	3.5"-4"	11" 12.5"	T	ABTEMPLATE P/50010 ABTEMPLATE P/50011	A836-0 A836-0	ABSSS-S N/A	Tx36"41" Tx36"41"
	6"	11"-13"	4"-458"		T				
Amaline			B	HAND	HOLE ORIE	B DebattONS isonisted.	 Persot evert poles with set having fin hans installe Sockey copyled brighter much be each when		

/A LITHONIA LIGHTING

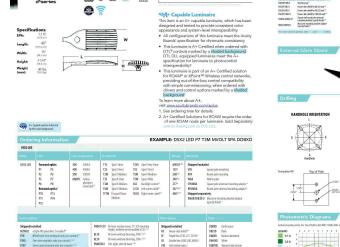

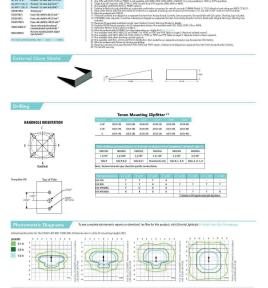

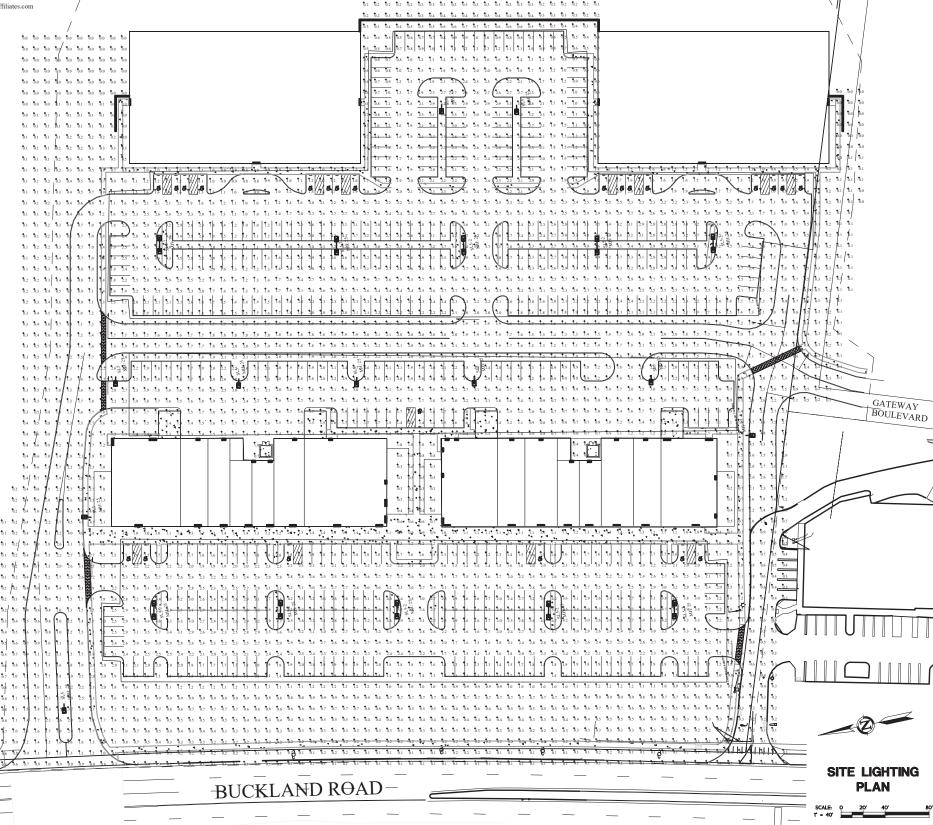






ELEVATIONS | SOUTH BUILDING

ELEVATIONS | SOUTH BUILDING



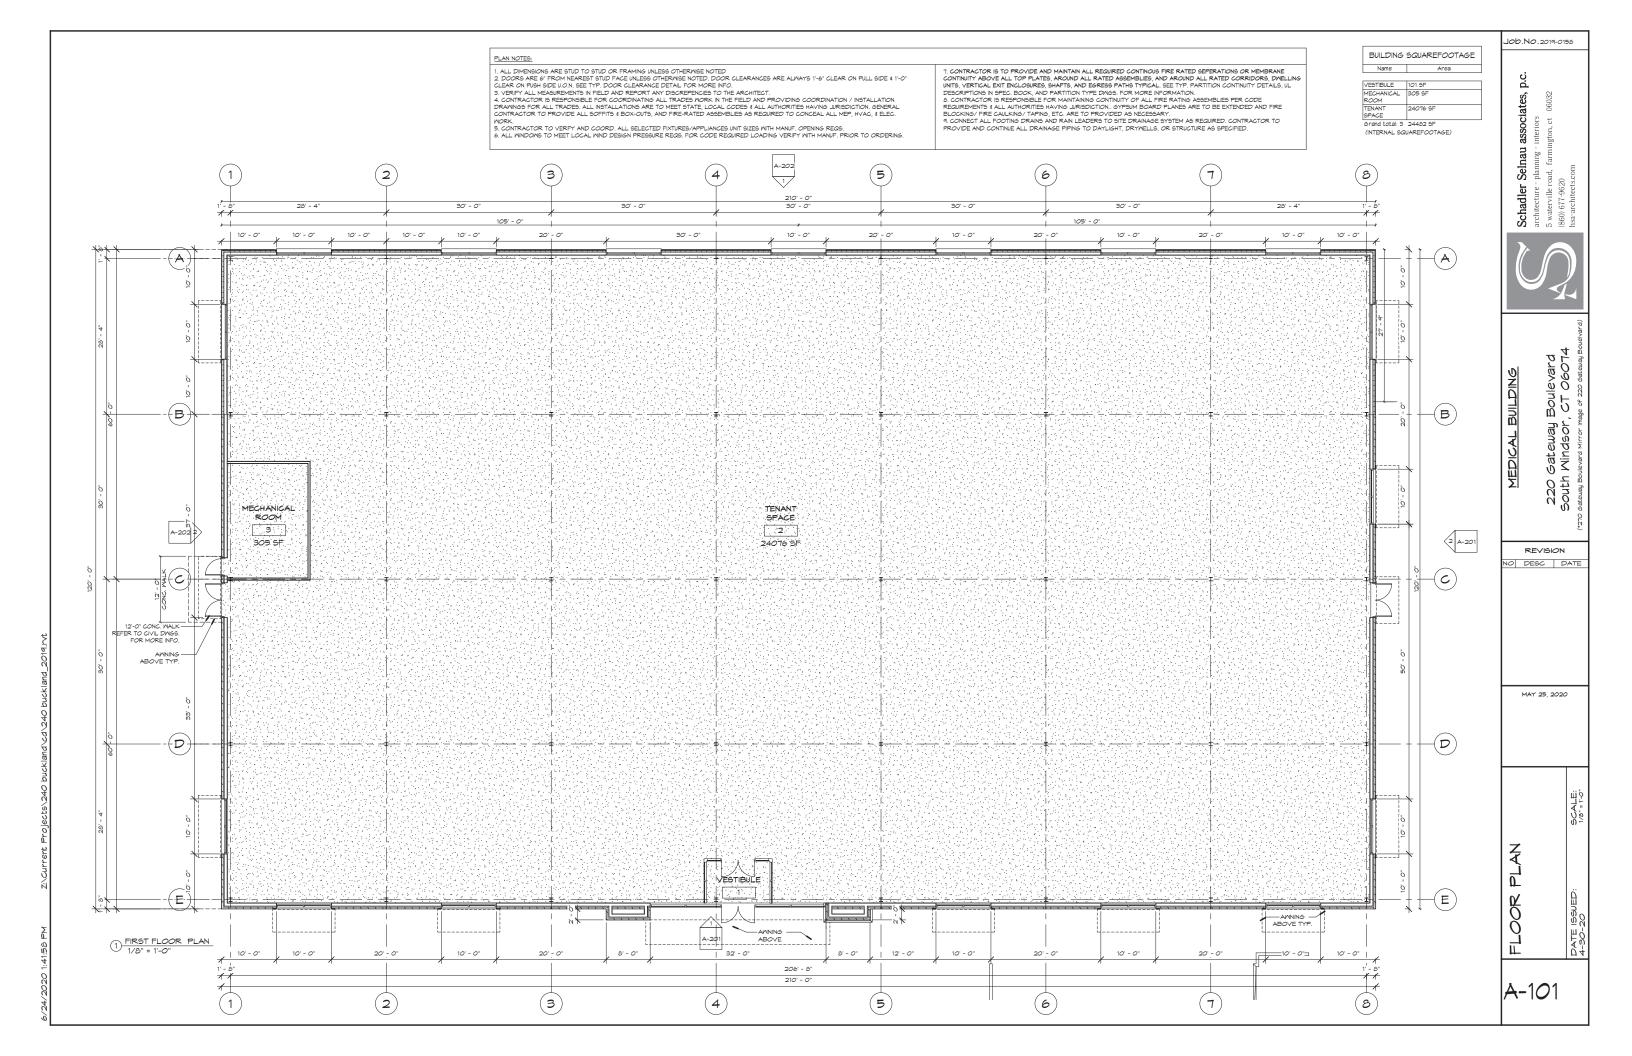

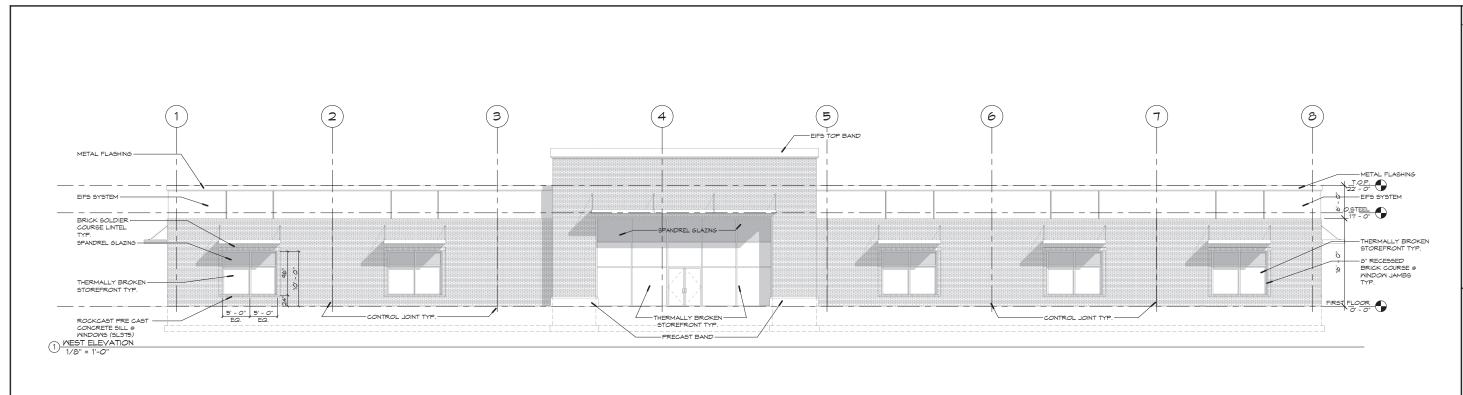

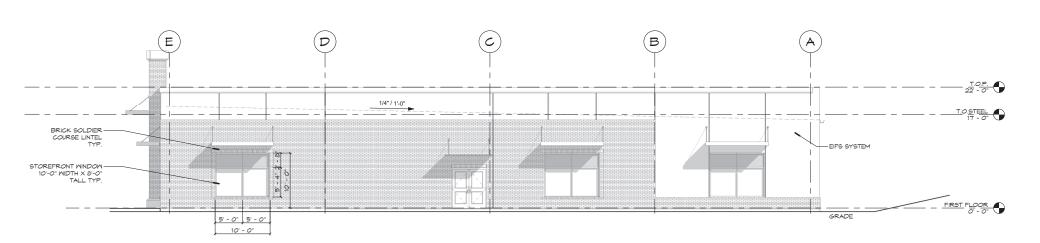

2 SOUTH ELEVATION 1/8" = 1'-0"

MEDICAL BUILDING

Job.No.2019-0158

Schadler Selnau associates, p.c. architecture - planning - interiors 5 waterville road, farmington, ct 06032 (880) 677-9620


220 Gateway Boulevard South Mindsor, CT 06074 REVISION


NO DESC DATE

MAY 25, 2020

A-201

ELEVATIONS

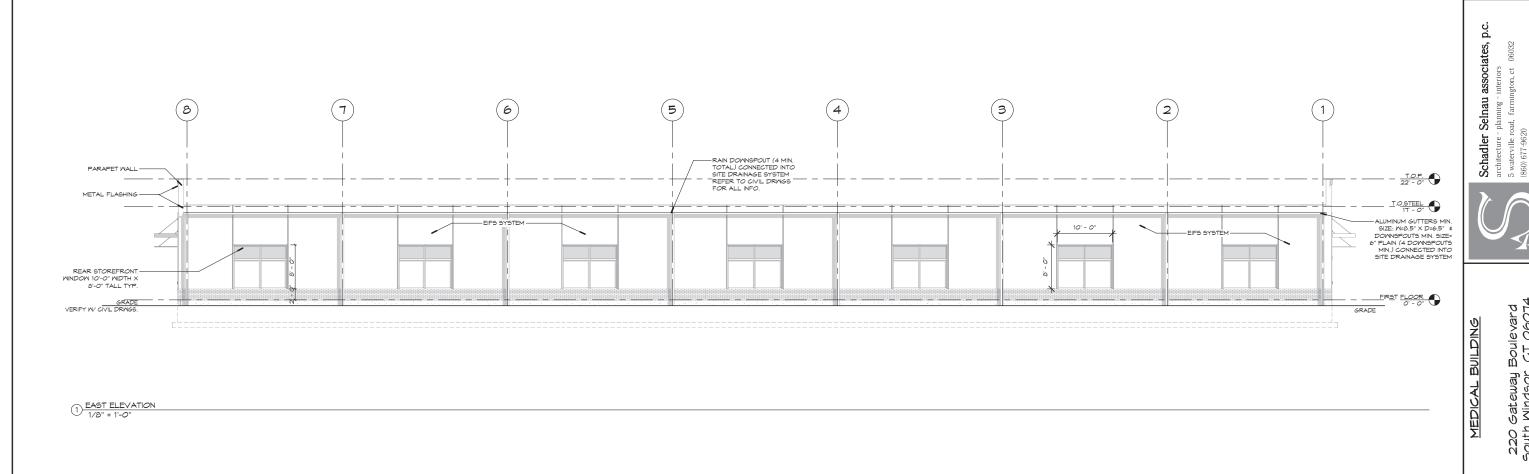

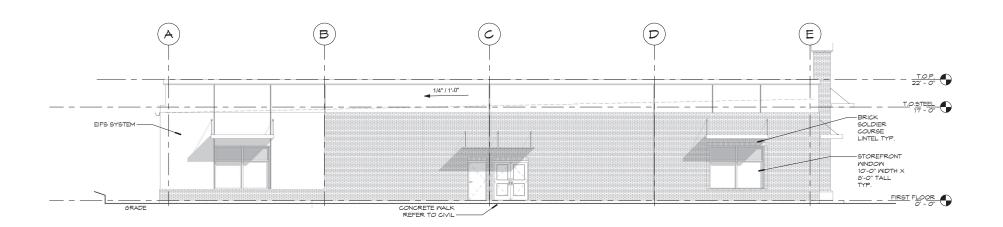

3 NORTH ELEVATION
1/8" = 1"-0"

MEDICAL BUILDING

REAL STOCK SATEWAY BOUIEVARD

SOUTH MINDSOR, CT 06074

SOUTH MINDSOR, CT 06074

MAY 25, 2020

Job.No.2019-0158

A-202

ELEVATIONS