




	VEHICLE	PARKING
MAX	9.6	9.2
AVG	4.6	4.3
MIN	1.5	1.4
AVG/MIN	3.1	3.1

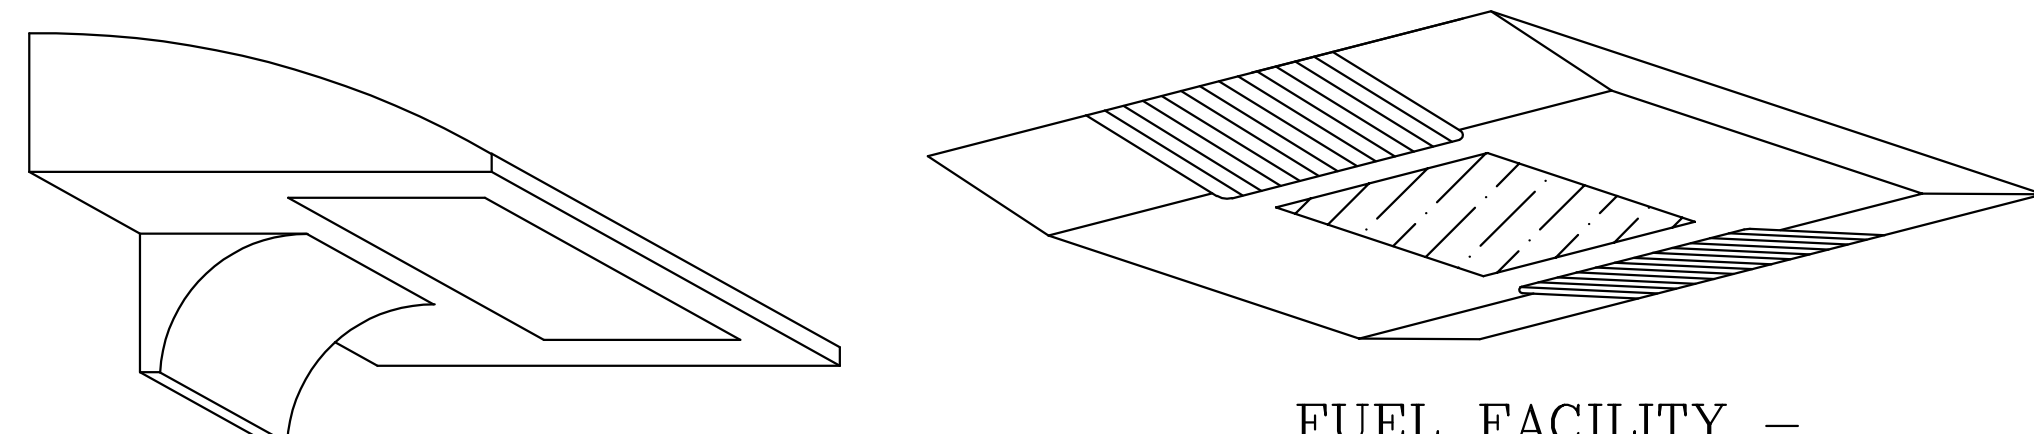

FIXTURE DESCRIPTION	
P	COOPER GALLEON GLEON-AF-08-LED-E1-5WQ-BZ, 445W TYPE 5 DISTRIBUTION. FIBERGLASS POLE 35'-0" ABOVE GRADE, WITH 0'-6" BASE.
P1	COOPER GALLEON GLEON-AF-08-LED-E1-SL3-HSS-BZ, 445W TYPE 3 DISTRIBUTION. FIBERGLASS POLE 35'-0" ABOVE GRADE, WITH 0'-6" BASE.
P2	COOPER GALLEON GLEON-AF-08-LED-E1-SL4-HSS-BZ, 445W TYPE 4 DISTRIBUTION. FIBERGLASS POLE 35'-0" ABOVE GRADE, WITH 0'-6" BASE.
P3	COOPER GALLEON GLEON-AF-08-LED-E1-SL2-HSS-BZ, 225W TYPE 2 DISTRIBUTION. FIBERGLASS POLE 27'-6" ABOVE GRADE, WITH 0'-6" BASE.
W	LITHONIA DSXW2 LED 40K 30C 1000 T2M, 109W LED, 20' MOUNTING HEIGHT
W1	LITHONIA DSXW2 LED 40K 30C 1000 T4W, 109W LED, 20' MOUNTING HEIGHT
W2	LITHONIA DSXW2 LED 40K 30C 530 T4M, 54W LED, 20' MOUNTING HEIGHT
GA	96W LED, SURFACE SYMETRIC DOWN LIGHT, FLAT LENS, 18' MOUNTING HEIGHT